



SEMITOP® 2

IGBT Module

SK25GH063


Preliminary Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- N channel, homogeneous Silicon structure (NPT-Non punchthrough IGBT)
- High short circuit capability
- Low tail current with low temperature dependence
- UL recognized, file no. E63532

Typical Applications*

- Switching (not for linear use)
- Inverter
- Switched mode power supplies
- UPS



GH

Absolute Maximum Ratings		$T_s = 25\text{ }^{\circ}\text{C}$, unless otherwise specified		
Symbol	Conditions	Values	Units	
IGBT				
V_{CES}	$T_j = 25\text{ }^{\circ}\text{C}$	600	V	
I_C	$T_j = 125\text{ }^{\circ}\text{C}$	$T_s = 25\text{ }^{\circ}\text{C}$	30	A
		$T_s = 80\text{ }^{\circ}\text{C}$	21	A
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$	60	A	
V_{GES}		± 20	V	
t_{psc}	$V_{CC} = 300\text{ V}; V_{GE} \leq 20\text{ V}; T_j = 125\text{ }^{\circ}\text{C}$ $V_{CES} < 600\text{ V}$	10	μs	
Inverse Diode				
I_F	$T_j = 150\text{ }^{\circ}\text{C}$	$T_s = 25\text{ }^{\circ}\text{C}$	36	A
		$T_s = 80\text{ }^{\circ}\text{C}$	24	A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$		A	
I_{FSM}	$t_p = 10\text{ ms}; \text{half sine wave } T_j = 150\text{ }^{\circ}\text{C}$	200	A	
Module				
$I_{t(RMS)}$			A	
T_{vj}		-40 ... +150	$^{\circ}\text{C}$	
T_{stg}		-40 ... +125	$^{\circ}\text{C}$	
V_{isol}	AC, 1 min.	2500	V	

Characteristics		$T_s = 25^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 0,7\text{ mA}$	4,5	5,5	6,5	V
I_{CES}	$V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$			0,1	$T_j = 25^\circ\text{C}$ mA
					$T_j = 125^\circ\text{C}$ mA
I_{GES}	$V_{CE} = 0\text{ V}, V_{GE} = 30\text{ V}$			120	$T_j = 25^\circ\text{C}$ nA
					$T_j = 125^\circ\text{C}$ nA
V_{CE0}			1		$T_j = 25^\circ\text{C}$ V
					$T_j = 125^\circ\text{C}$ V
r_{CE}	$V_{GE} = 15\text{ V}$		37		$T_j = 25^\circ\text{C}$ $\text{m}\Omega$
					$T_j = 125^\circ\text{C}$ $\text{m}\Omega$
$V_{CE(sat)}$	$I_{Cnom} = 30\text{ A}, V_{GE} = 15\text{ V}$		2,1	2,5	$T_j = 25^\circ\text{C}_{chiplev.}$ V
					$T_j = 125^\circ\text{C}_{chiplev.}$ V
C_{ies}	$V_{CE} = 25, V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$	1,3		nF
C_{oes}			0,15		nF
C_{res}			0,1		nF
$t_{d(on)}$	$R_{Gon} = 33\ \Omega$	$V_{CC} = 300\text{V}$ $I_C = 25\text{A}$	37		ns
t_r			40		ns
E_{on}	$R_{Goff} = 33\ \Omega$	$T_j = 125^\circ\text{C}$ $V_{GE} = \pm 15\text{V}$	1,1		mJ
$t_{d(off)}$			200		ns
t_f			30		ns
E_{off}	per IGBT		0,8		mJ
$R_{th(j-s)}$			1,4		K/W



IGBT Module

SK25GH063


Preliminary Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- N channel, homogeneous Silicon structure (NPT-Non punchtrough IGBT)
- High short circuit capability
- Low tail current with low temperature dependence
- UL recognized, file no. E63532

Typical Applications*





- Switching (not for linear use)
- Inverter
- Switched mode power supplies
- UPS



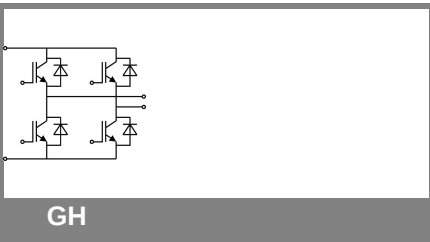


Characteristics						
Symbol	Conditions		min.	typ.	max.	Units
Inverse Diode						
V _F = V _{EC}	I _{Fnom} = 25 A; V _{GE} = 0 V	T _j = 25 °C _{chiplev.}		1,45	1,7	V
		T _j = 125 °C _{chiplev.}		1,4	1,75	V
V _{F0}		T _j = 125 °C		0,85	0,9	V
r _F		T _j = 125 °C		22	32	mΩ
I _{RRM}	I _F = 25 A di/dt = -500 A/μs V _{CC} = 300V	T _j = 125 °C		16		A
Q _{rr}				2		μC
E _{rr}				0,25		mJ
R _{th(j-s)D}	per diode				1,7	K/W
M _s	to heat sink M1				2	Nm
w				21		g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.


* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

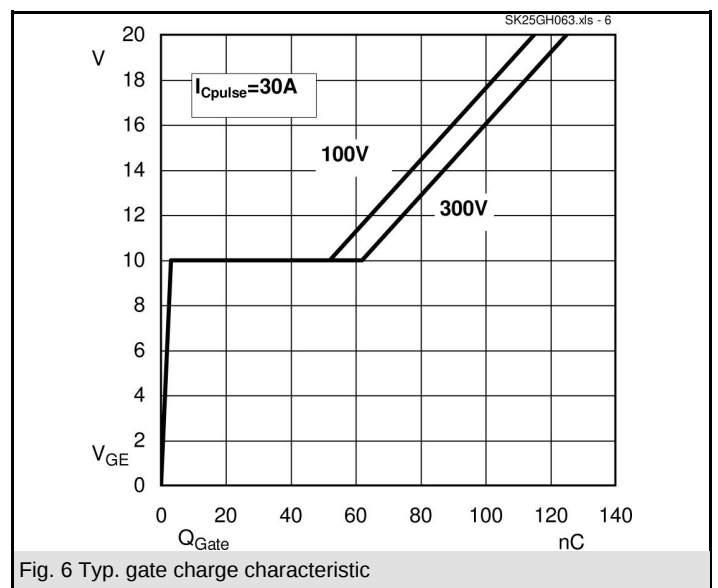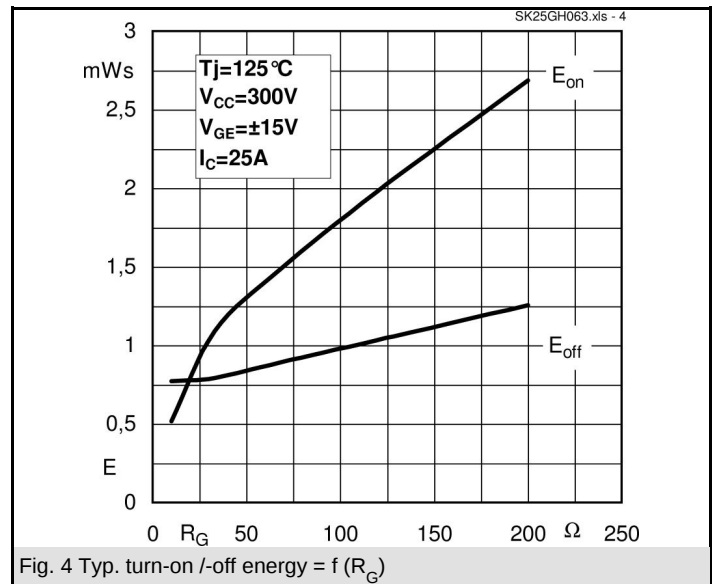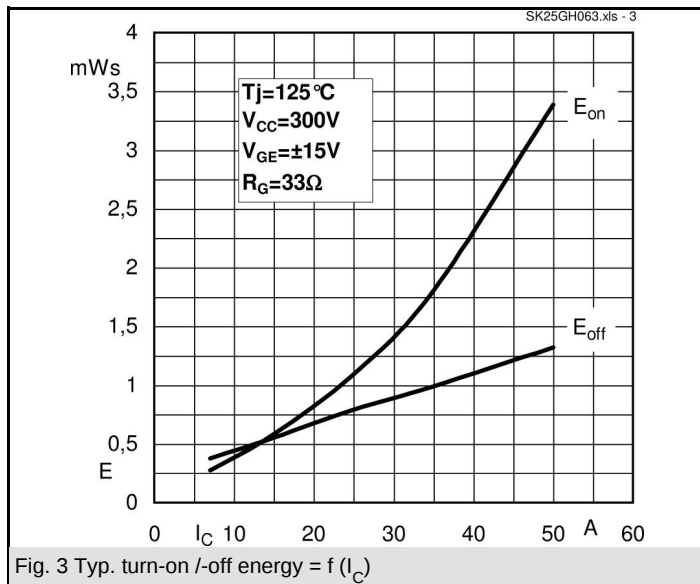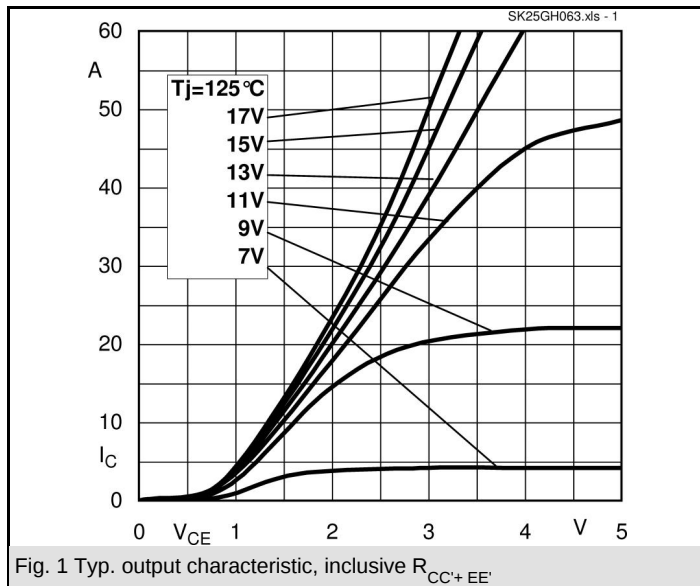

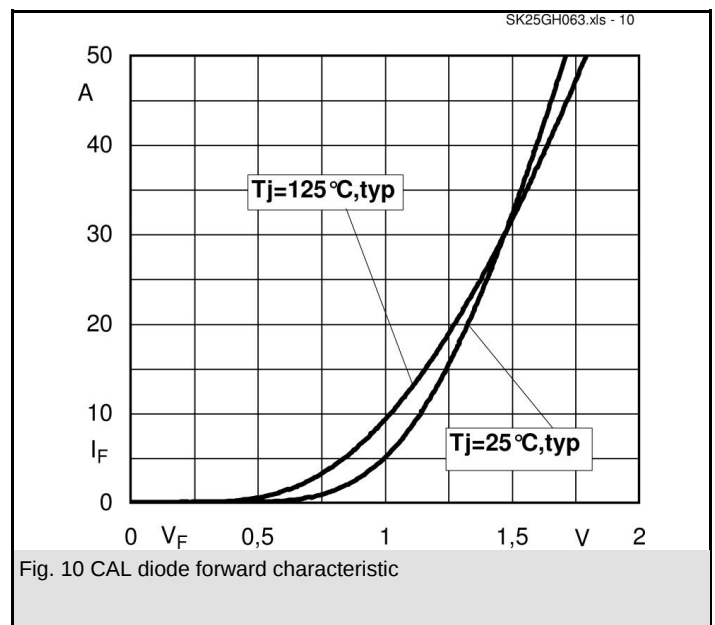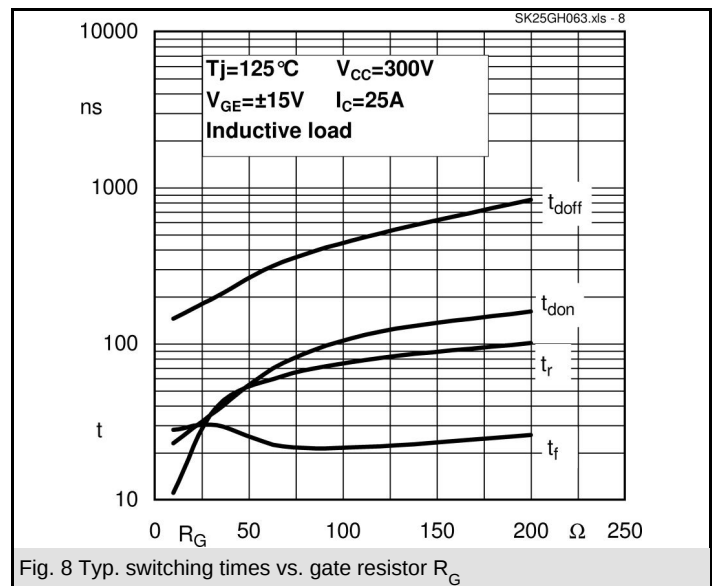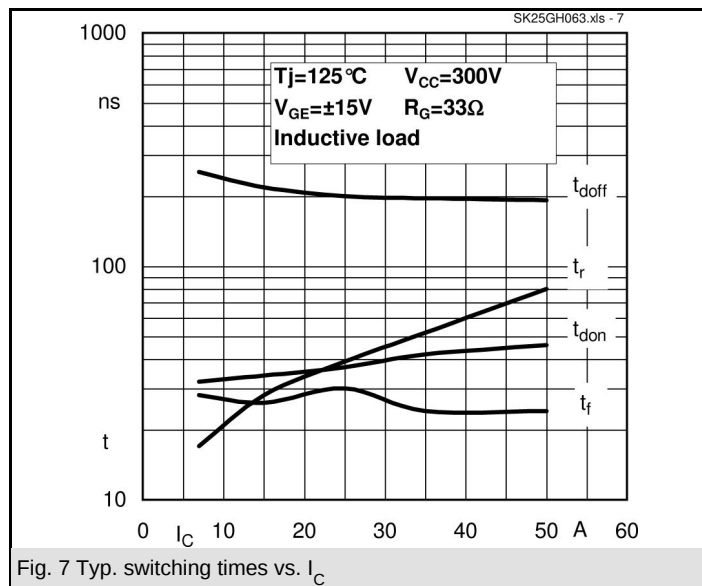

UL recognized file

no. E 63 532

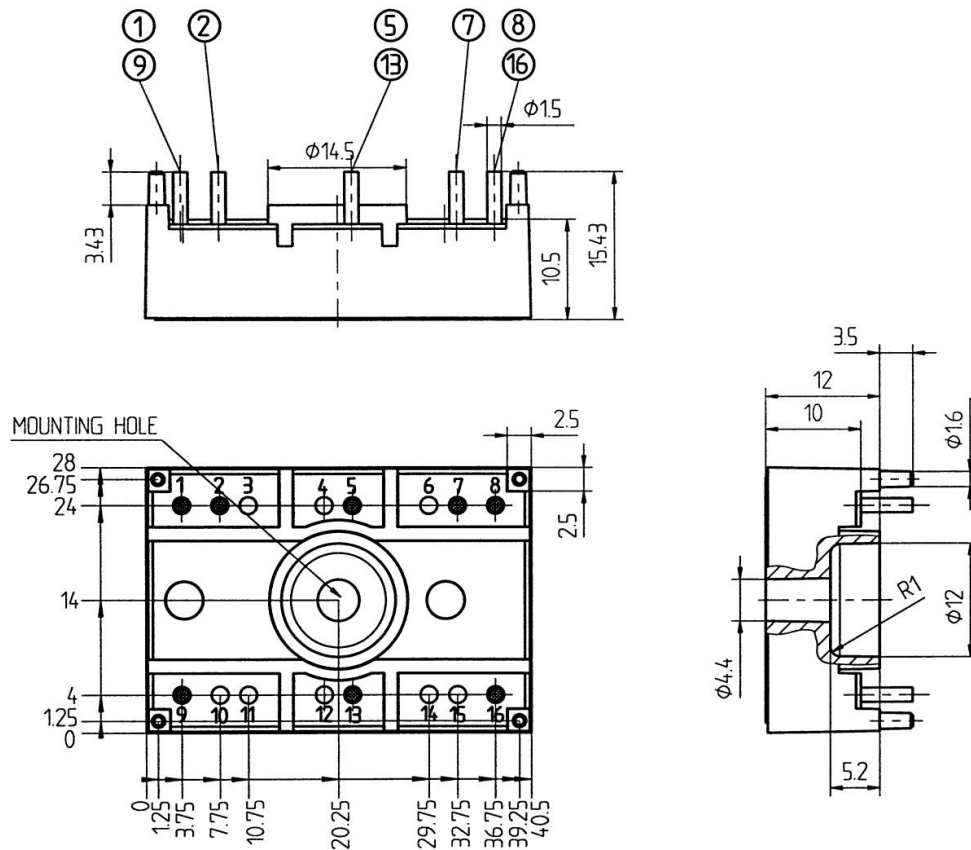

Case T5 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins:2mm)

