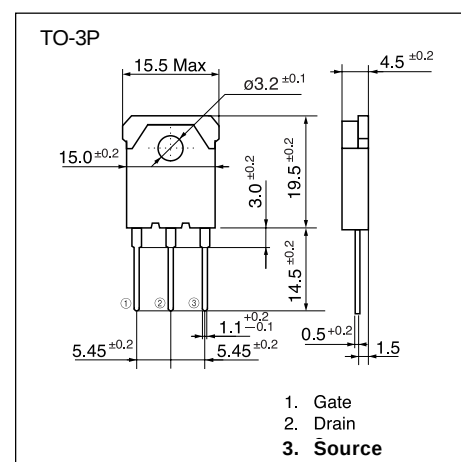


N-CHANNEL SILICON POWER MOS-FET**Features**

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof


Applications

- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

**Maximum ratings and characteristic Absolute maximum ratings****(Tc=25°C unless otherwise specified)**

Item	Symbol	Rating	Unit
Drain-source voltage	V_{DS}	60	V
Continuous drain current	I_D	±80	A
Pulsed drain current	$I_{D(puls)}$	±320	A
Gate-source voltage	V_{GS}	±30	V
Maximum Avalanche Energy	E_{AV}^{*1}	972.3	mJ
Max. power dissipation	P_D	125	W
Operating and storage temperature range	T_{ch} T_{sto}	+150 -55 to +150	°C

*1 L=0.203mm, Vcc=24V






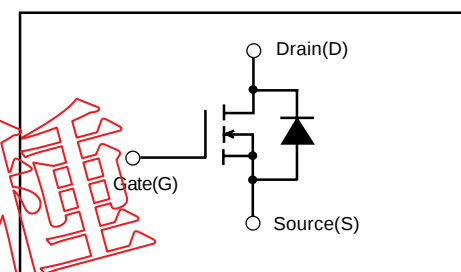
Equivalent circuit schematic**Electrical characteristics (Tc=25°C unless otherwise specified)**






Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	BV_{DS}	$I_D=1mA$ $V_{GS}=0V$	60			V
Gate threshold voltage	$V_{GS(th)}$	$I_D=10mA$ $V_{DS}=V_{GS}$	2.5	3.0	3.5	V
Zero gate voltage drain current	I_{DSS}	$V_{DS}=60V$ $V_{GS}=0V$ $T_{ch}=25°C$		10	500	μA
		$T_{ch}=125°C$		0.2	1.0	mA
Gate-source leakage current	I_{GSS}	$V_{GS}=±30V$ $V_{DS}=0V$		10	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$I_D=40A$ $V_{GS}=10V$		9.5	12	mΩ
Forward transconductance	g_{fs}	$I_D=40A$ $V_{DS}=25V$	20	40		S
Input capacitance	C_{iss}	$V_{DS}=25V$		3100	4650	pF
Output capacitance	C_{oss}	$V_{GS}=0V$		1300	1950	pF
Reverse transfer capacitance	C_{rss}	$f=1MHz$		350	530	pF
Turn-on time t_{on}	$t_{d(on)}$	$V_{CC}=30V$ $I_D=80A$		20	30	ns
	t_r	$V_{GS}=10V$		85	120	ns
	$t_{d(off)}$	$R_{GS}=10Ω$		88	130	ns
Turn-off time t_{off}	t_f			65	120	ns
Avalanche capability	I_{AV}	$L=100μH$ $T_{ch}=25°C$	80			A
Diode forward on-voltage	V_{SD}	$I_F=50A$ $V_{GS}=0V$ $T_{ch}=25°C$		1.0	1.5	V
Reverse recovery time	t_{rr}	$I_F=50A$ $V_{GS}=0V$		70		ns
Reverse recovery charge	Q_{rr}	$-di/dt=100A/μs$ $T_{ch}=25°C$		0.13		μC




Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	$R_{th(ch-c)}$	channel to case			1.0	°C/W
	$R_{th(ch-a)}$	channel to ambient			35.0	°C/W

Characteristics

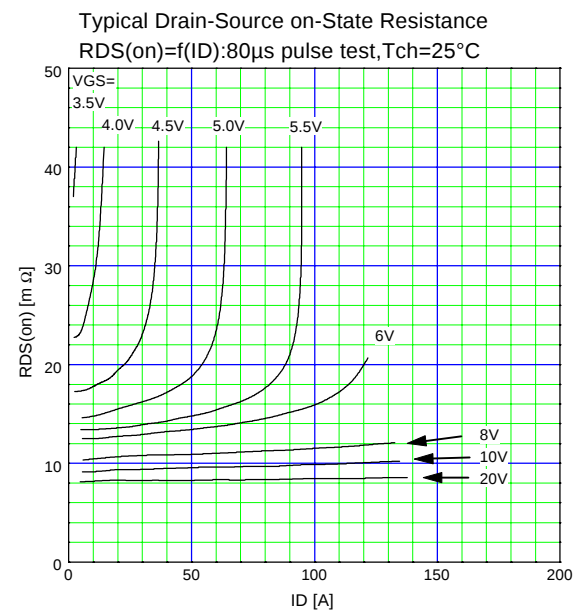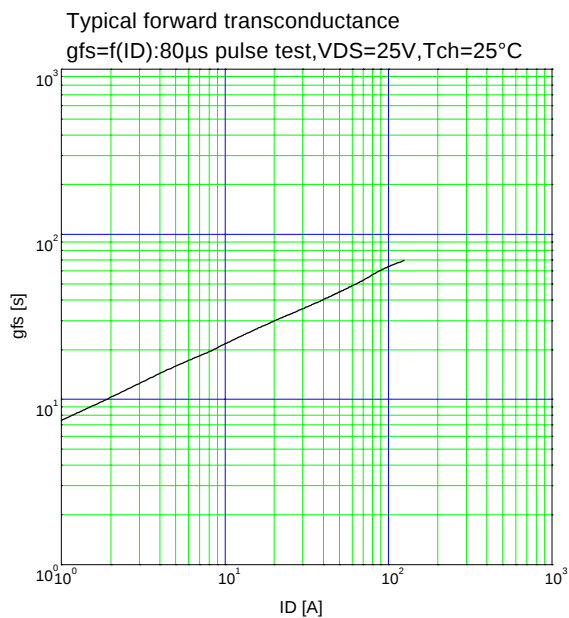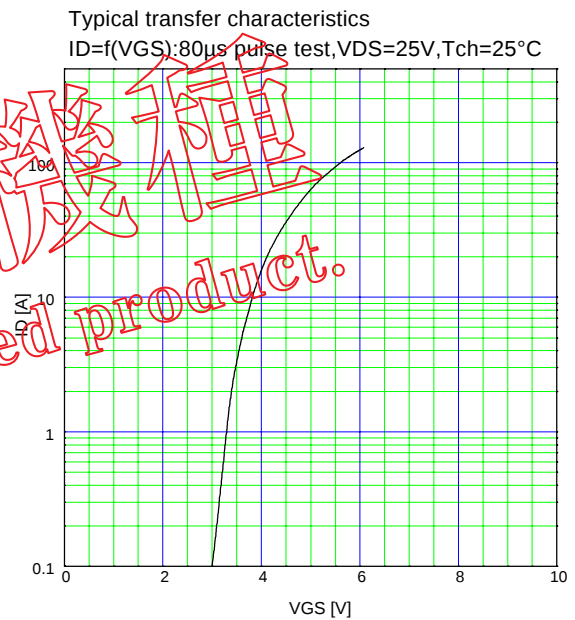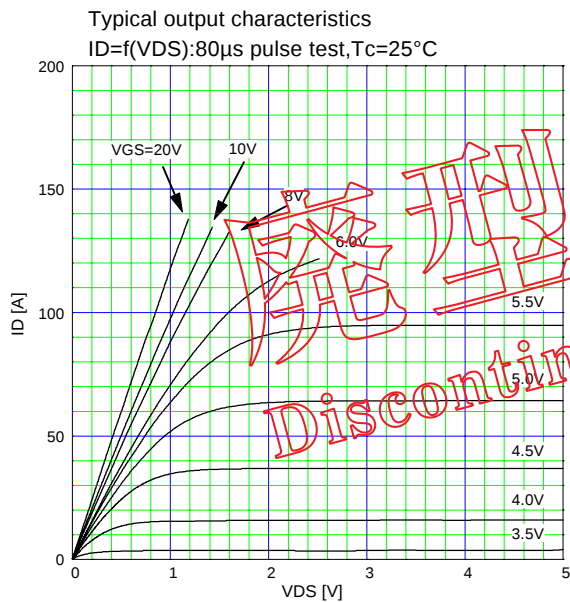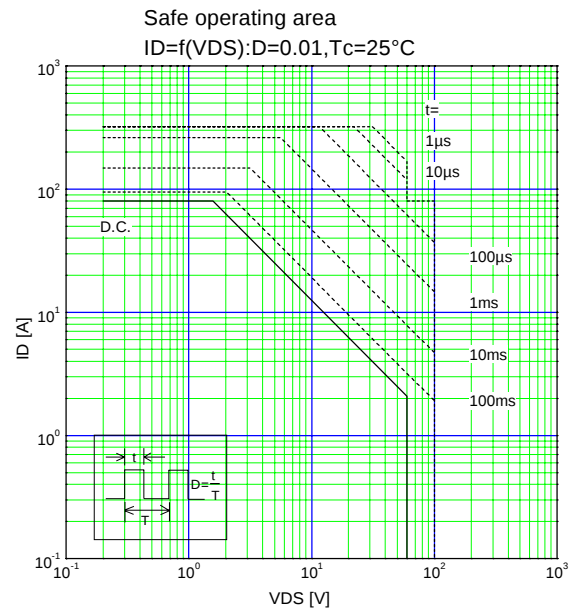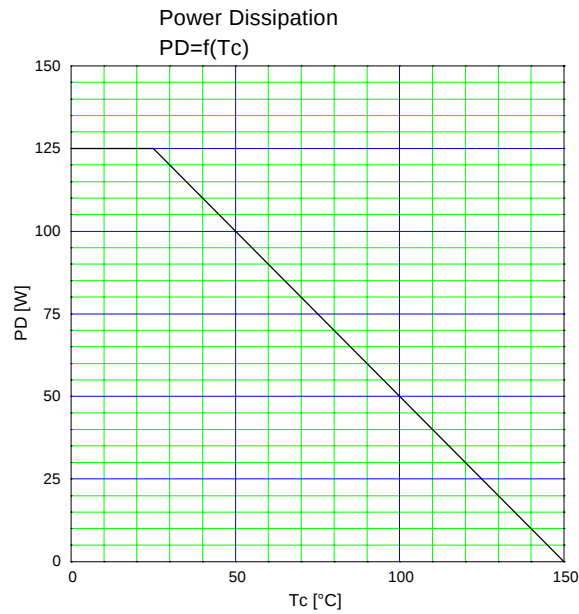

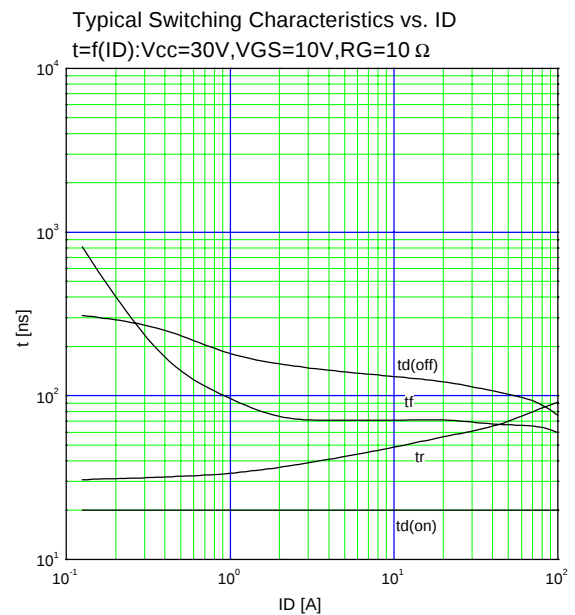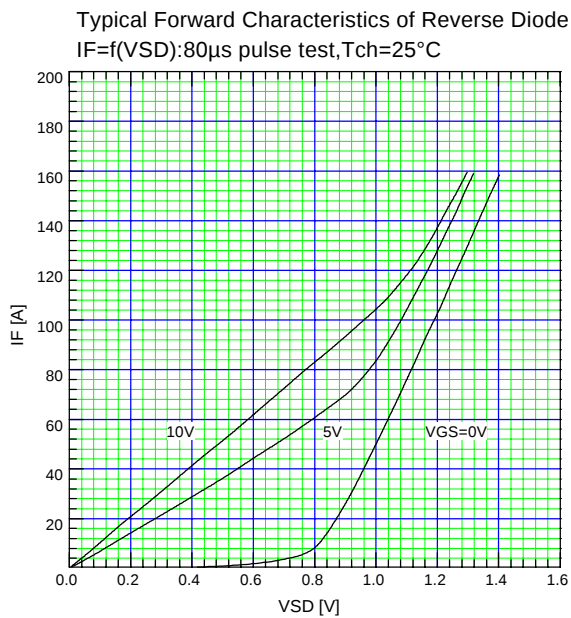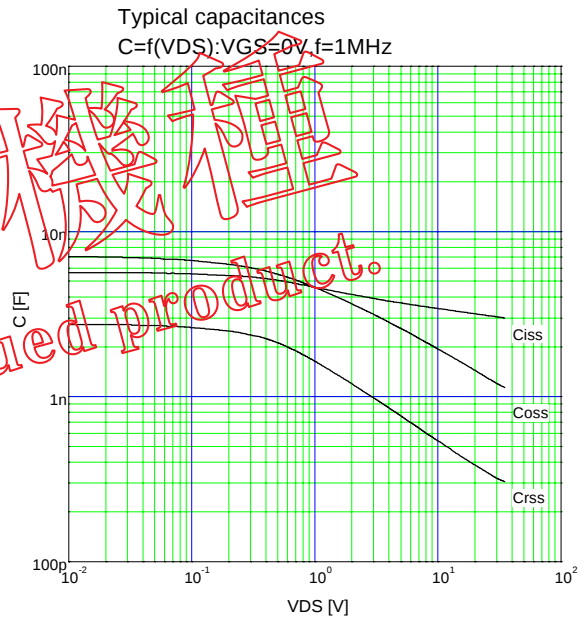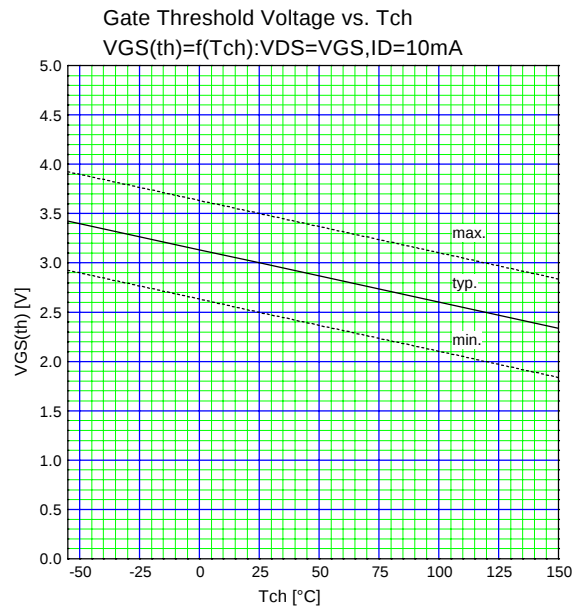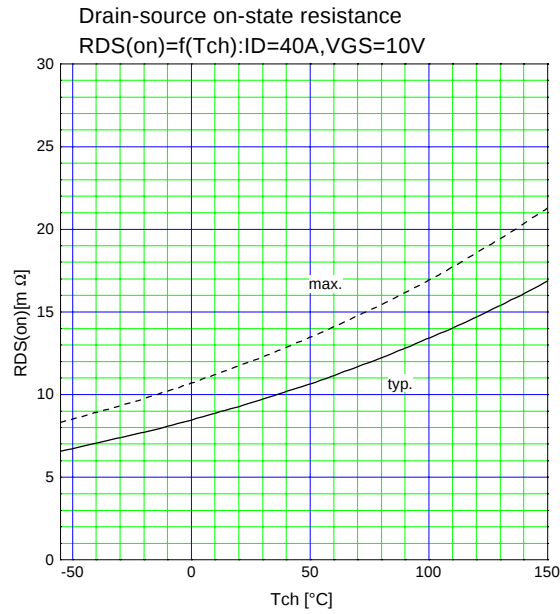

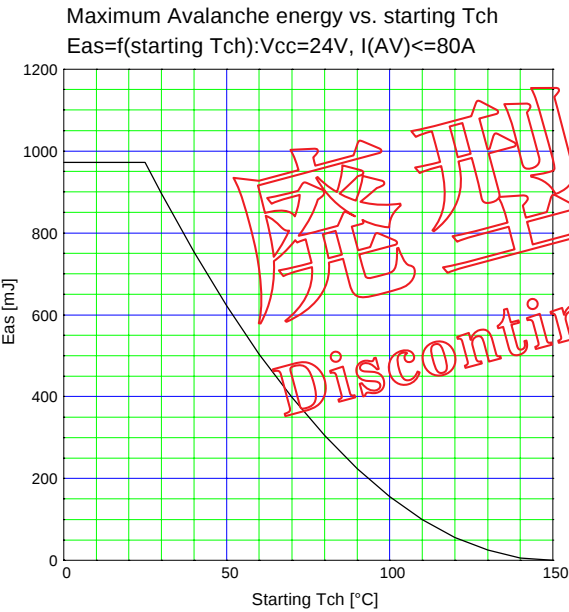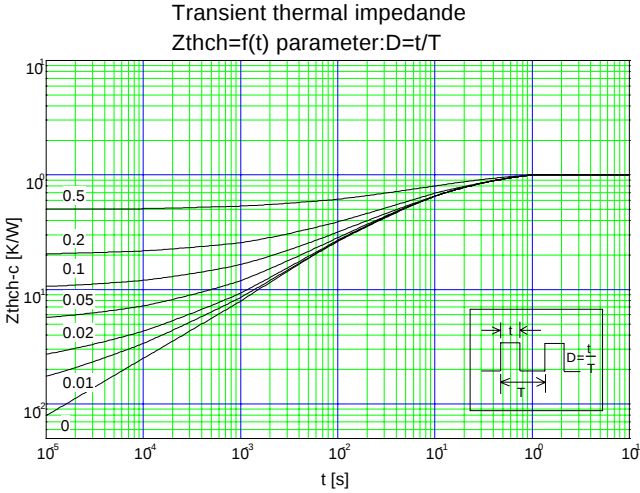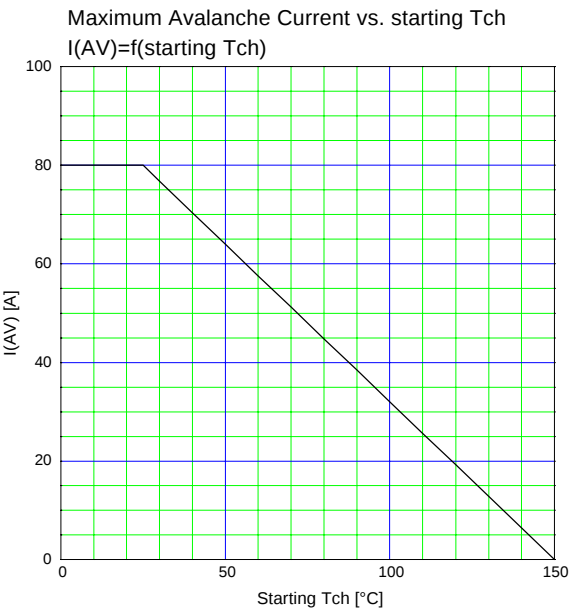

廢型機種
Discontinued product.