

FUJI POWER MOSFET

Super FAP-G Series

N-CHANNEL SILICON POWER MOSFET

Features

High speed switching
Low on-resistance
No secondary breakdown
Low driving power
Avalanche-proof

Applications

Switching regulators
UPS (Uninterruptible Power Supply)
DC-DC converters

Maximum ratings and characteristic Absolute maximum ratings

($T_c=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Ratings	Unit
Drain-source voltage	V_{DS}	100	V
	V_{DSX}^*5	70	V
Continuous drain current	I_D	± 41	A
Pulsed drain current	$I_{D(puls)}$	± 164	A
Gate-source voltage	V_{GS}	± 30	V
Non-repetitive Avalanche current	I_{AS}^*2	41	A
Maximum Avalanche Energy	E_{AS}^*1	204.7	mJ
Maximum Drain-Source dV/dt	dV_{DS}/dt^*4	20	kV/ μs
Peak Diode Recovery dV/dt	dV/dt^*3	5	kV/ μs
Max. power dissipation	P_D / $T_a=25^\circ\text{C}$	2.16	W
	$T_c=25^\circ\text{C}$	5.2	W
Operating and storage temperature range	T_{ch} / T_{stg}	$+150$ / -55 to $+150$	$^\circ\text{C}$
Isolation voltage	V_{ISO}^*6		kVrms

*1 $L=146\mu\text{H}$, $V_{CC}=48\text{V}$, $T_{ch}=25^\circ\text{C}$, See to Avalanche Energy Graph *2 $T_{ch} \leq 150^\circ\text{C}$

*3 $I_F \leq -I_D$, $-di/dt=50\text{A}/\mu\text{s}$, $V_{CC} \leq BV_{DSS}$, $T_{ch} \leq 50^\circ\text{C}$ *4 $V_{DS} \leq 100\text{V}$ *5 $V_{GS}=-30\text{V}$ *6 $t=60\text{sec}$ $f=60\text{Hz}$


Electrical characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	$V_{(BR)DSS}$	$I_D=250\mu\text{A}$ $V_{GS}=0\text{V}$	100			V
Gate threshold voltage	$V_{GS(th)}$	$I_D=250\mu\text{A}$ $V_{DS}=V_{GS}$	3.0		5.0	V
Zero gate voltage drain current	I_{DSS}	$V_{DS}=100\text{V}$ $V_{GS}=0\text{V}$ $T_{ch}=25^\circ\text{C}$			25	μA
		$V_{DS}=80\text{V}$ $V_{GS}=0\text{V}$ $T_{ch}=125^\circ\text{C}$			250	μA
Gate-source leakage current	I_{GSS}	$V_{GS}=\pm 30\text{V}$ $V_{DS}=0\text{V}$		10	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$I_D=15\text{A}$ $V_{GS}=10\text{V}$		34	44	m Ω
Forward transconductance	g_{fs}	$I_D=15\text{A}$ $V_{DS}=25\text{V}$	9	18		S
Input capacitance	C_{iss}	$V_{DS}=75\text{V}$		1110	1665	pF
Output capacitance	C_{oss}	$V_{GS}=0\text{V}$		280	420	pF
Reverse transfer capacitance	C_{rss}	$f=1\text{MHz}$		22	33	pF
Turn-on time t_{on}	$t_{d(on)}$	$V_{CC}=48\text{V}$ $I_D=15\text{A}$		16	24	ns
	t_r	$V_{GS}=10\text{V}$		23	35	ns
Turn-off time t_{off}	$t_{d(off)}$	$R_{GS}=10\Omega$		31	47	ns
	t_f			16	24	ns
Total Gate Charge	Q_G	$V_{CC}=50\text{V}$		32	48	nC
Gate-Source Charge	Q_{GS}	$I_D=30\text{A}$		13	20	nC
Gate-Drain Charge	Q_{GD}	$V_{GS}=10\text{V}$		9	14	nC
Avalanche capability	I_{AV}	$L=146\mu\text{H}$ $T_{ch}=25^\circ\text{C}$	41			A
Diode forward on-voltage	V_{SD}	$I_F=30\text{A}$ $V_{GS}=0\text{V}$ $T_{ch}=25^\circ\text{C}$		1.10	1.65	V
Reverse recovery time	t_{rr}	$I_F=30\text{A}$ $V_{GS}=0\text{V}$		0.1		μs
Reverse recovery charge	Q_{rr}	$-di/dt=100\text{A}/\mu\text{s}$ $T_{ch}=25^\circ\text{C}$		0.38		μC


Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	$R_{th(ch-c)}$	channel to case			2.359	$^\circ\text{C}/\text{W}$
	$R_{th(ch-a)}$	channel to ambient			58.0	$^\circ\text{C}/\text{W}$







Outline Drawings (mm)






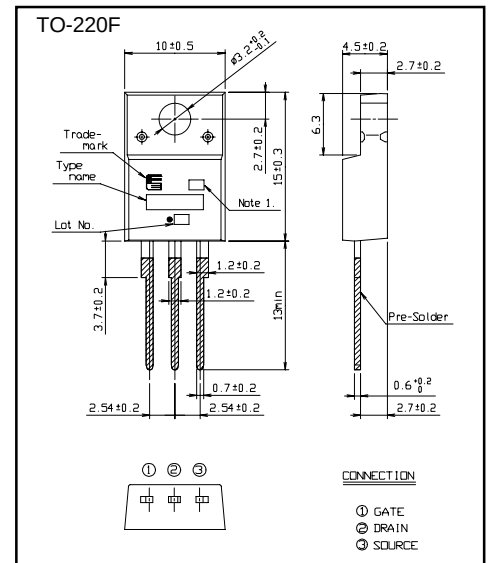




Equivalent circuit schematic

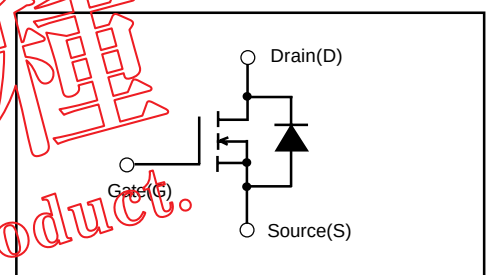

Characteristics

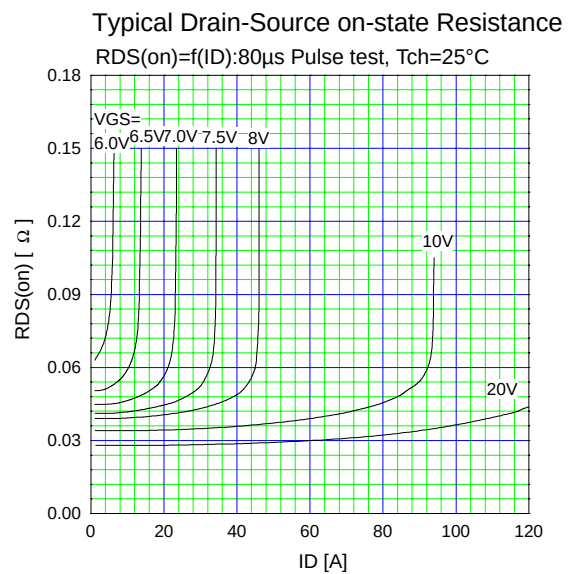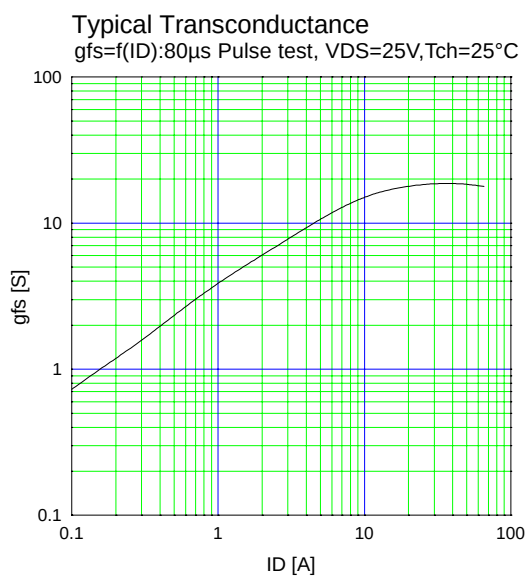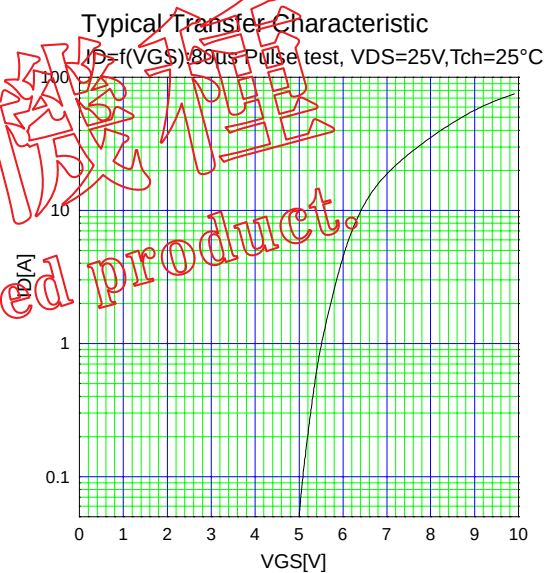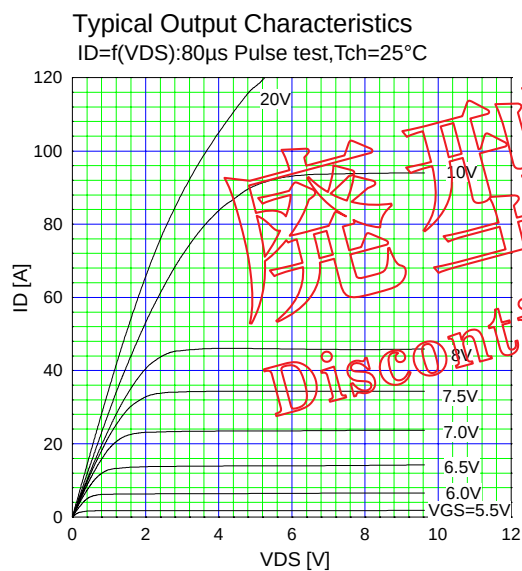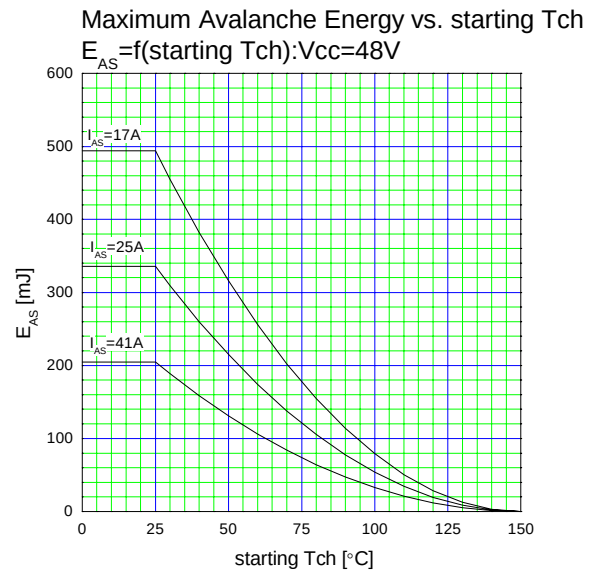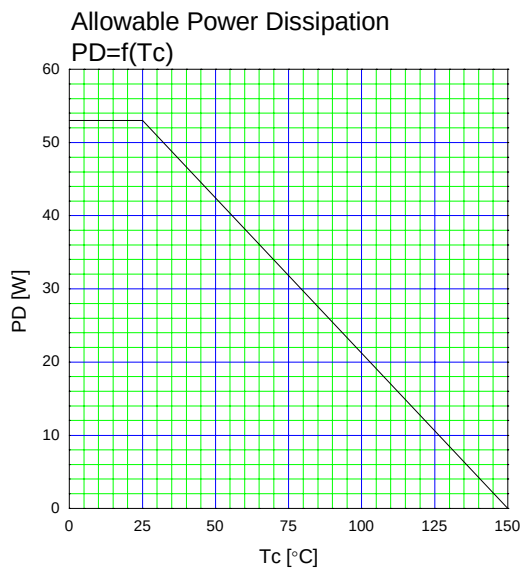

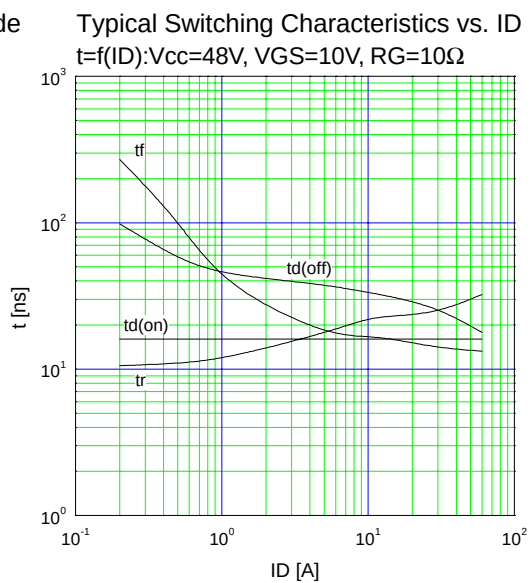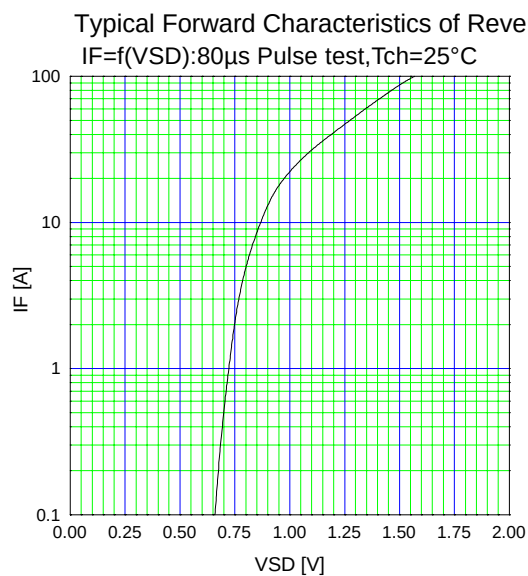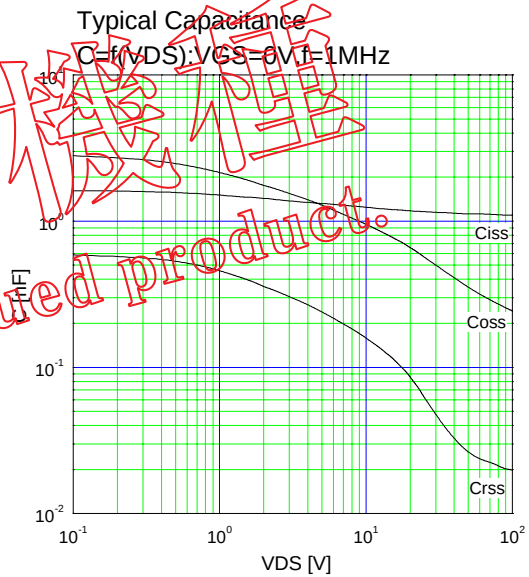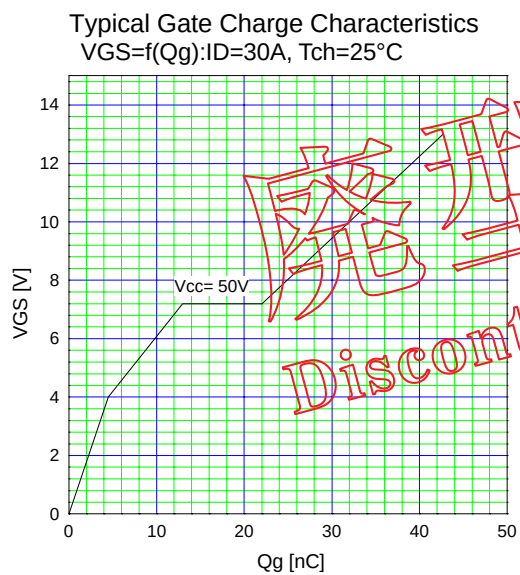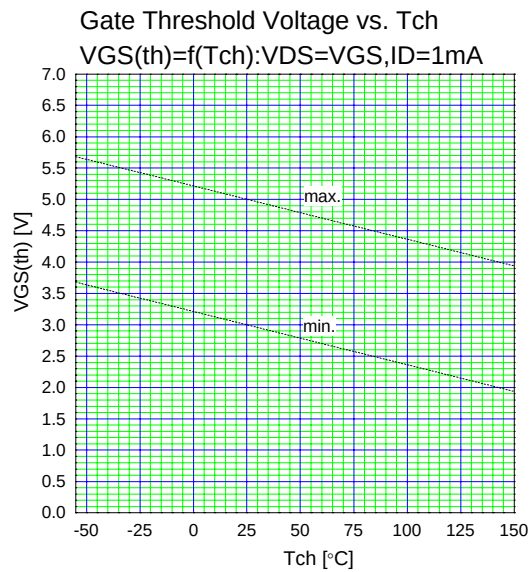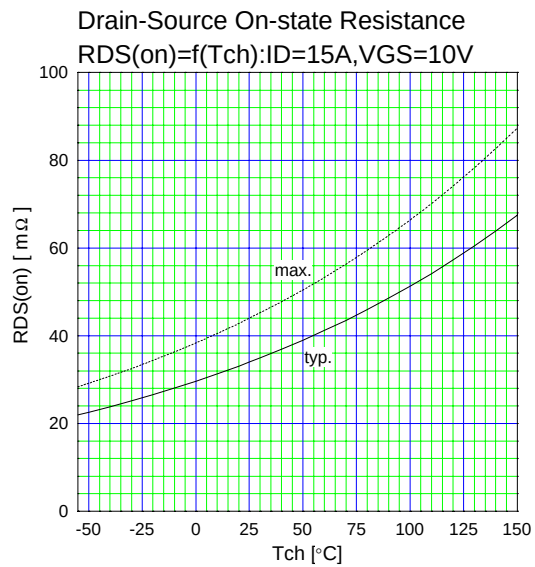

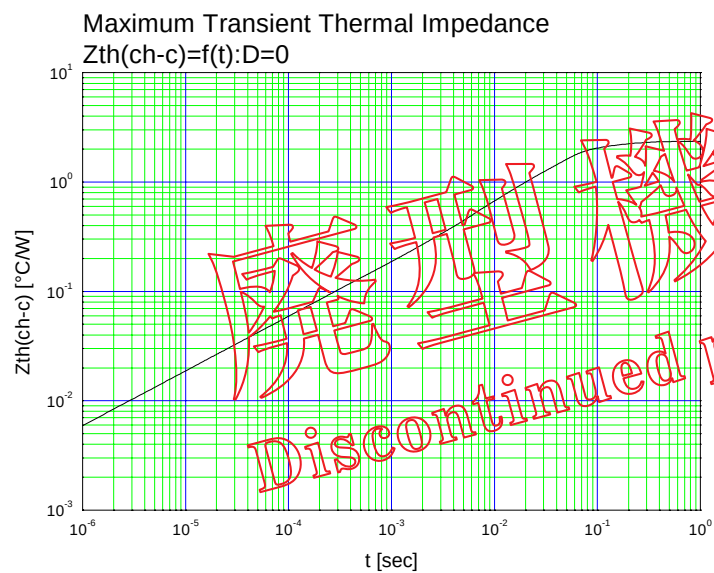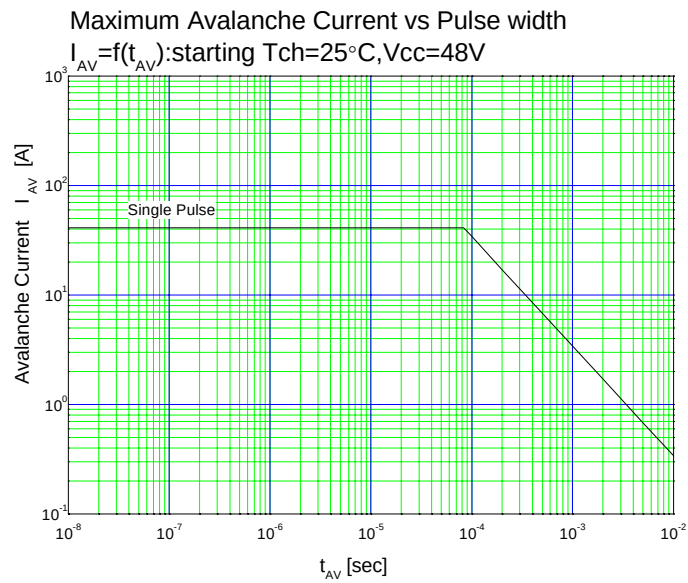

廢型機種
Discontinued product.