

2SK3674-01L,S,SJ


FUJI
ELECTRIC

200304

FUJI POWER MOSFET Super FAP-G Series

N-CHANNEL SILICON POWER MOSFET

■ Outline Drawings [mm]



■ Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof

■ Applications


- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

■ Maximum ratings and characteristic Absolute maximum ratings

● (Tc=25°C unless otherwise specified)

Item	Symbol	Ratings	Unit
Drain-source voltage	V _{DS}	900	V
	V _{DSX} *5	900	V
Continuous drain current	I _D	±7	A
Pulsed drain current	I _D (puls)	±28	A
Gate-source voltage	V _{GS}	±30	V
Repetitive or non-repetitive	I _{AR} *2	7	A
Maximum Avalanche Energy	E _{AS} *1	269.5	mJ
Maximum Drain-Source dV/dt	dV _{DS} /dt *4	40	kV/μs
Peak Diode Recovery dV/dt	dV/dt *3	5	kV/μs
Max. power dissipation	P _D Ta=25°C	1.67	W
	Tc=25°C	225	W
Operating and storage temperature range	T _{ch}	+150	°C
	T _{stg}	-55 to +150	°C

■ Equivalent circuit schematic

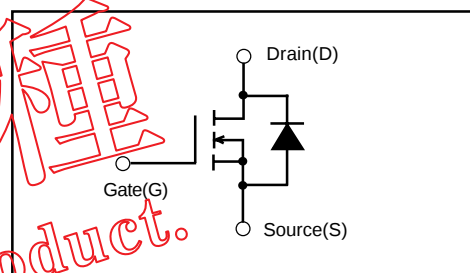

*1 L=10.1mH, V_{CC}=90V, T_{ch}=25°C, See to Avalanche Energy Graph *2 T_{ch}=150°C

*3 I_F=-I_D, -di/dt=50A/μs, V_{CC}≤BV_{DSS}, T_{ch}≤150°C *4 V_{GS}≤900V *5 V_{GS}=-30V







● Electrical characteristics (Tc=25°C unless otherwise specified)






Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	V _{(BR)DSS}	I _D =250μA V _{GS} =0V	900			V
Gate threshold voltage	V _{GS(th)}	I _D =250μA V _{DS} =V _{GS}	3.0		5.0	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =900V V _{GS} =0V			25	μA
		V _{DS} =720V V _{GS} =0V			250	μA
Gate-source leakage current	I _{GSS}	V _{GS} =±30V V _{DS} =0V			100	nA
Drain-source on-state resistance	R _{DS(on)}	I _D =3.5A V _{GS} =10V		1.54	2.00	Ω
Forward transconductance	g _{fs}	I _D =3.5A V _{DS} =25V	4.1	8.2		S
Input capacitance	C _{iss}	V _{DS} =25V		920	1380	pF
Output capacitance	C _{oss}	V _{GS} =0V		115	175	pF
Reverse transfer capacitance	C _{rss}	f=1MHz		6.6	10	pF
Turn-on time t _{on}	td(on)	V _{CC} =600V I _D =3.5A		22	33	ns
	tr	V _{GS} =10V		8.0	12	ns
Turn-off time t _{off}	td(off)	R _{GS} =10 Ω		45	67.5	ns
	tr			10.5	16	ns
Total Gate Charge	Q _G	V _{CC} =450V		25	37.5	nC
Gate-Source Charge	Q _{GS}	I _D =7A		4	6	nC
Gate-Drain Charge	Q _{GD}	V _{GS} =10V		8.5	13	nC
Avalanche capability	I _{AV}	L=10.1mH T _{ch} =25°C	7			A
Diode forward on-voltage	V _{SD}	I _F =7A V _{GS} =0V T _{ch} =25°C		0.90	1.50	V
Reverse recovery time	t _{rr}	I _F =7A V _{GS} =0V		2.6		μs
Reverse recovery charge	Q _{rr}	-di/dt=100A/μs T _{ch} =25°C		8.0		μC



● Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R _{th(ch-c)}	channel to case			0.560	°C/W
	R _{th(ch-a)}	channel to ambient			75.0	°C/W

Characteristics

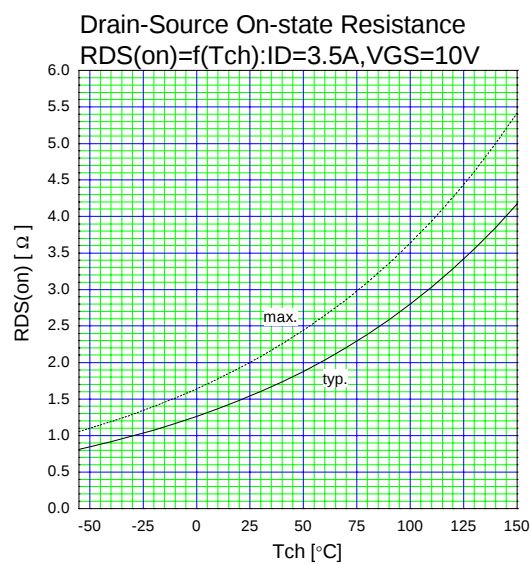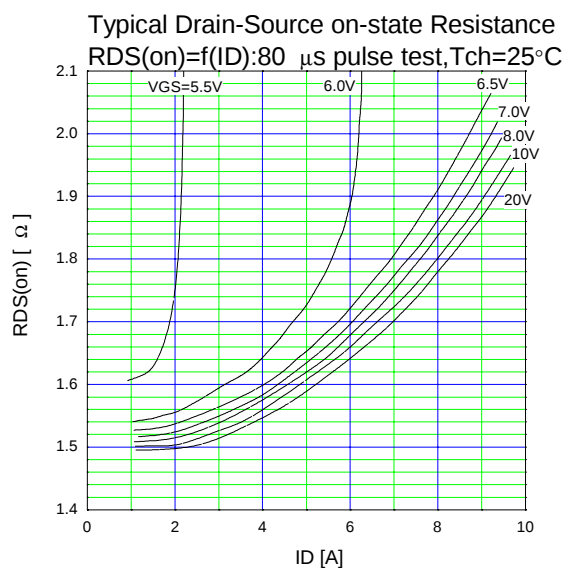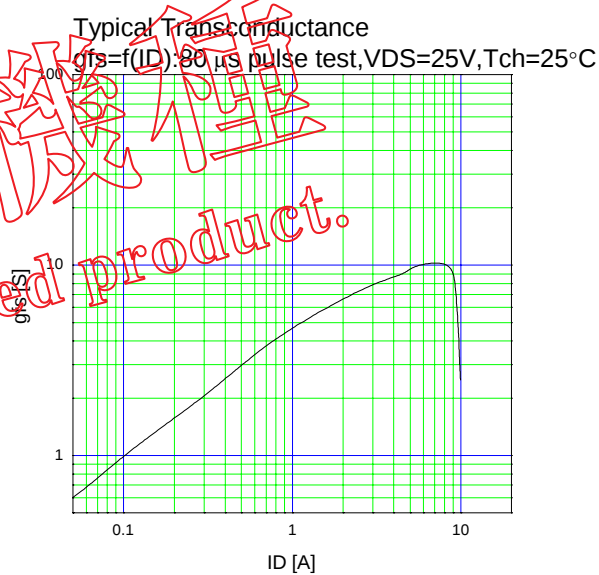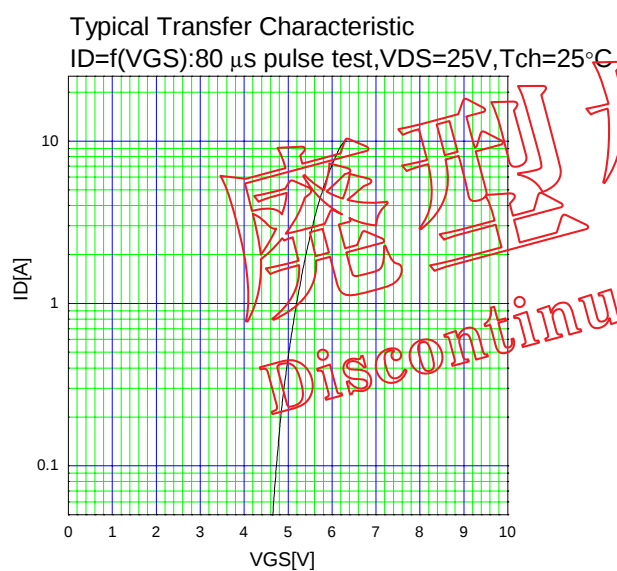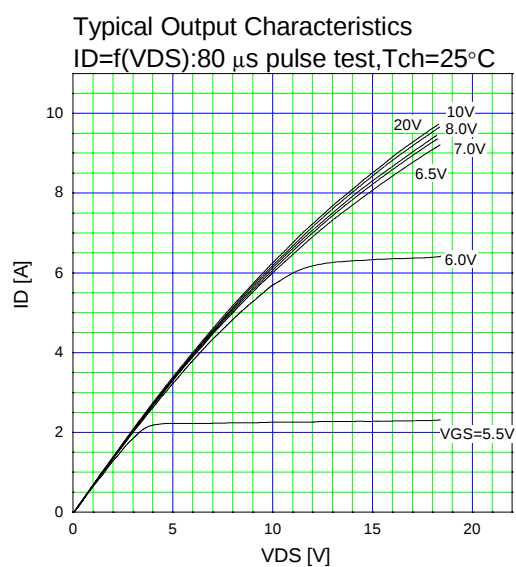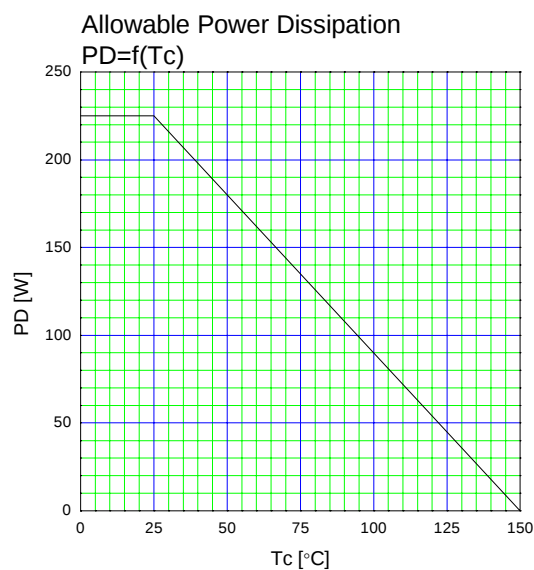


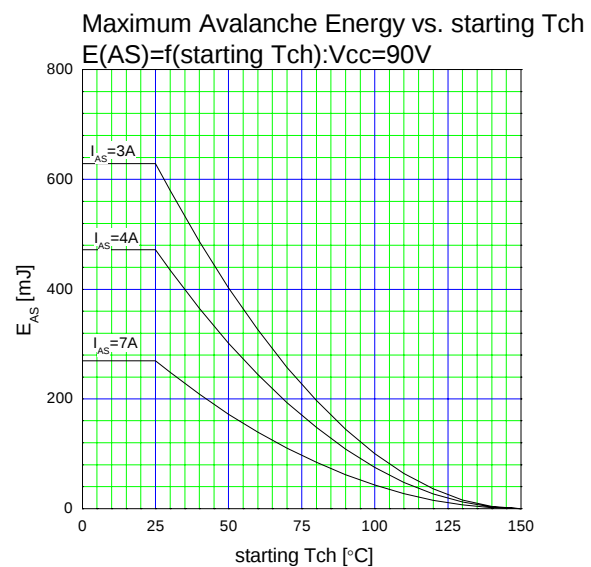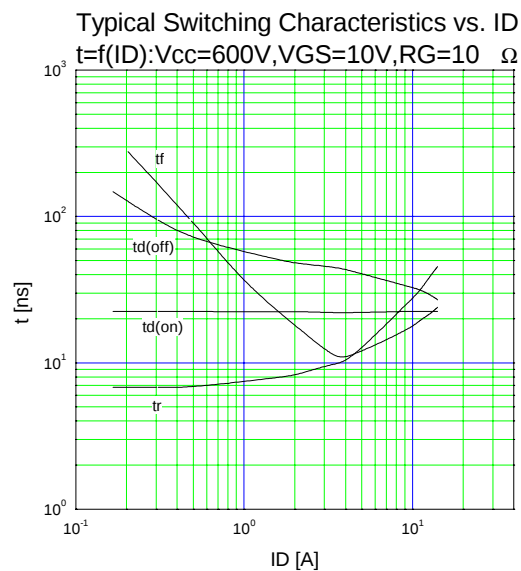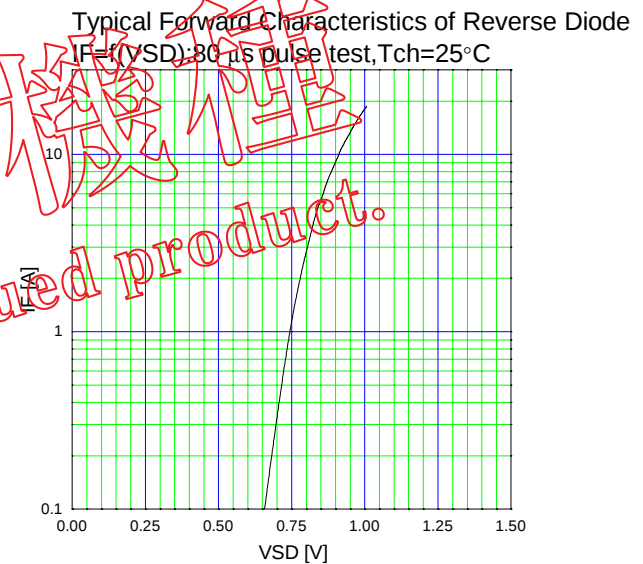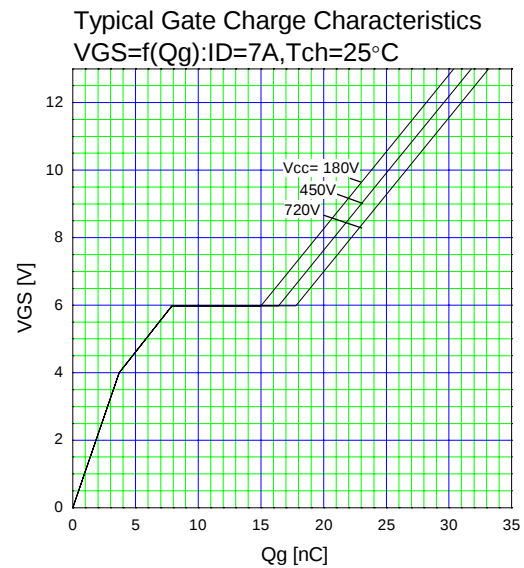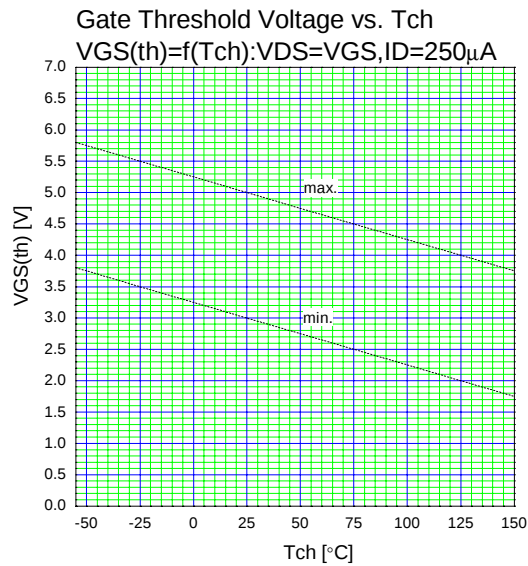

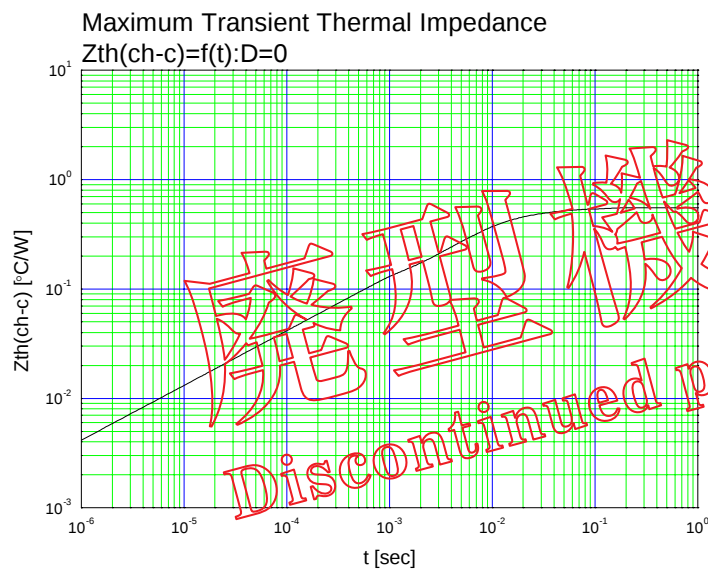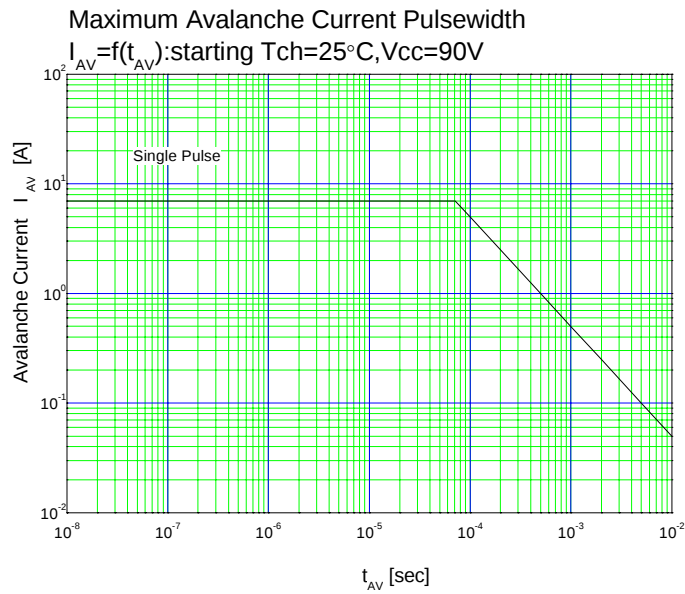


Outline Drawings (mm)

Type(L)

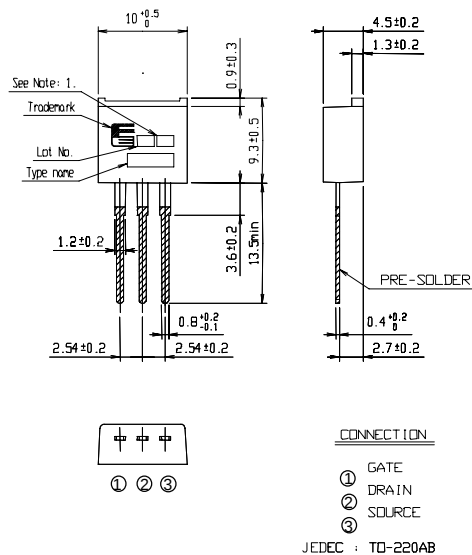

Type(S)

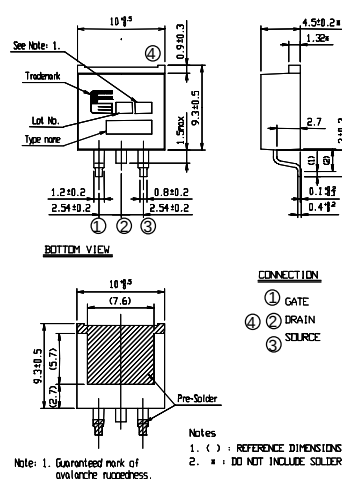

Type(SJ)

