

FUJI POWER MOSFET
Super FAP-G Series

N-CHANNEL SILICON POWER MOSFET

■ Features

High speed switching
Low on-resistance
No secondary breakdown
Low driving power
Avalanche-proof

■ Applications

Switching regulators
UPS (Uninterruptible Power Supply)
DC-DC converters

■ Maximum ratings and characteristic Absolute maximum ratings

(Tc=25°C unless otherwise specified)

Item	Symbol	Ratings	Unit
Drain-source voltage	V _{DS}	700	V
	V _{DSX} *5	700	V
Continuous drain current	I _D	±12	A
Pulsed drain current	I _D (puls)	±48	A
Gate-source voltage	V _{GS}	±30	V
Repetitive or non-repetitive	IAR *2	12	A
Maximum Avalanche Energy	EAS *1	276.7	mJ
Maximum Drain-Source dV/dt	dV _{DS} /dt *4	40	kV/μs
Peak Diode Recovery dV/dt	dV/dt *3	5	kV/μs
Max. power dissipation	P _D / T _a =25°C	2.16	W
	T _c =25°C	95	W
Operating and storage temperature range	T _g	+150	°C
Isolation Voltage	T ₃₀	-55 to +150	°C
	V _{iso} *6	2	kVrms

*1 L=3.53mH, V_{CC}=70V, T_{ch}=25°C, See to Avalanche Energy Graph *2 T_{ch}=150°C*3 I_F≤-I_D, -di/dt=50A/μs, V_{CC}≤BV_{DSS}, T_{ch}≤150°C *4 V_{DS}≤700V *5 V_{GS}=-30V *6 t=60sec, f=60Hz


● Electrical characteristics (Tc=25°C unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	V(BR) _{DSS}	I _D =250μA V _{GS} =0V	700			V
Gate threshold voltage	V _{GS(th)}	I _D =250μA V _{DS} =V _{GS}	3.0		5.0	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =700V V _{GS} =0V T _{ch} =25°C			25	μA
		V _{DS} =560V V _{GS} =0V T _{ch} =125°C			250	μA
Gate-source leakage current	I _{GSS}	V _{GS} =±30V V _{DS} =0V			100	nA
Drain-source on-state resistance	R _{DS(on)}	I _D =6A V _{GS} =10V		0.72	0.93	Ω
Forward transconductance	g _{fs}	I _D =6A V _{DS} =25V	6	12		S
Input capacitance	C _{iss}	V _{DS} =25V		1100	1650	pF
Output capacitance	C _{oss}	V _{GS} =0V		170	255	pF
Reverse transfer capacitance	C _{rss}	f=1MHz		11	17	pF
Turn-on time t _{on}	td(on)	V _{CC} =300V I _D =6A		24.5	36	ns
	t _r	V _{GS} =10V		7.5	12	ns
	td(off)	R _{GS} =10Ω		47.5	72	ns
Turn-off time t _{off}	t _r			10	17	ns
	Q _G	V _{CC} =350V		31	46.5	nC
	Q _{GS}	I _D =12A		4.5	8	nC
Gate-Drain Charge	Q _{GD}	V _{GS} =10V		11	16.5	nC
Avalanche capability	I _{AV}	L=3.53mH T _{ch} =25°C	12			A
Diode forward on-voltage	V _{SD}	I _F =12A V _{GS} =0V T _{ch} =25°C		0.90	1.50	V
Reverse recovery time	t _{rr}	I _F =12A V _{GS} =0V		2.6		μs
Reverse recovery charge	Q _{rr}	-di/dt=100A/μs T _{ch} =25°C		16.0		μC


● Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R _{th(ch-c)}	channel to case			1.316	°C/W
	R _{th(ch-a)}	channel to ambient			58.0	°C/W







■ Outline Drawings [mm]






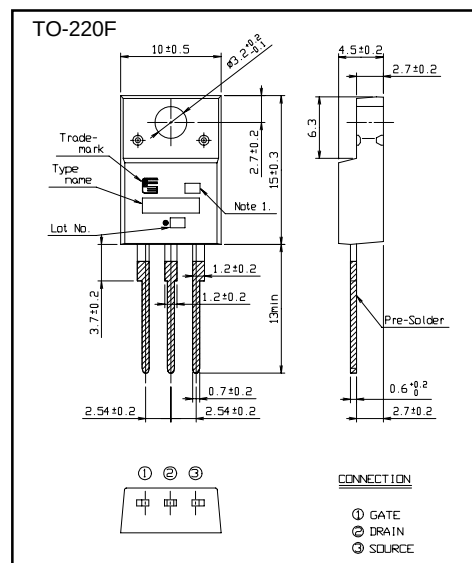




■ Equivalent circuit schematic

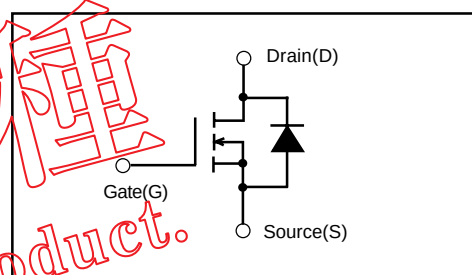

Characteristics

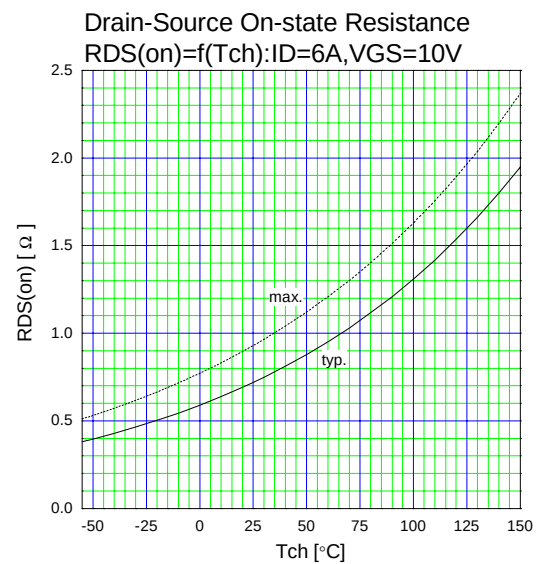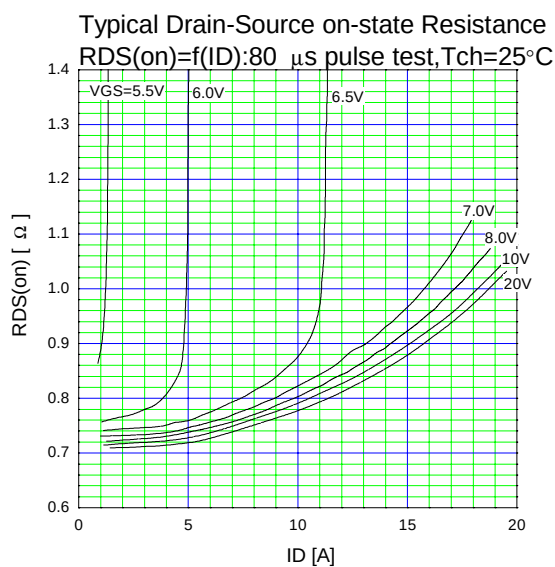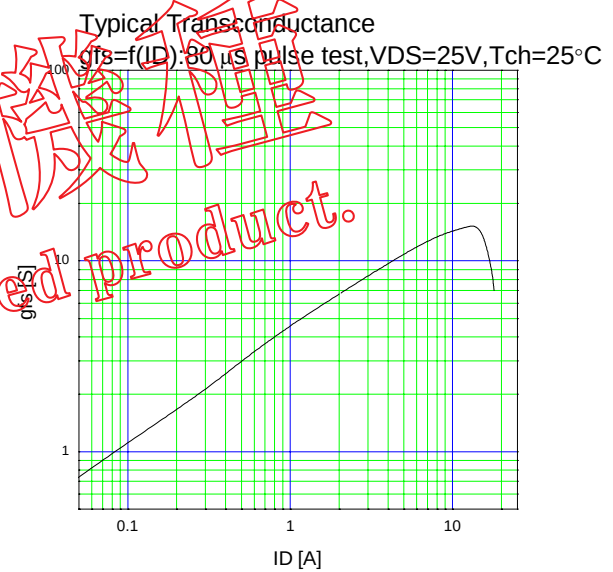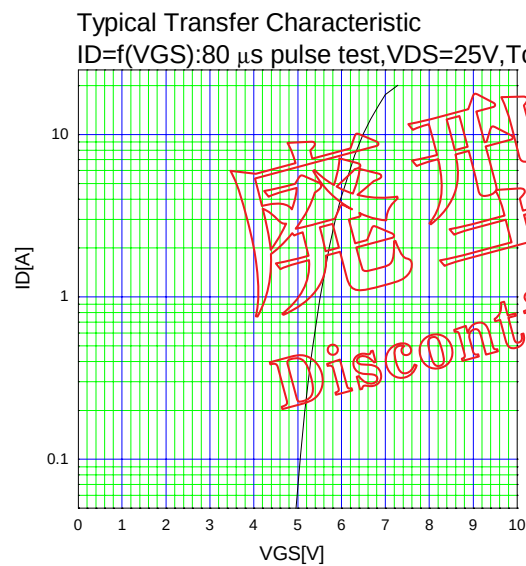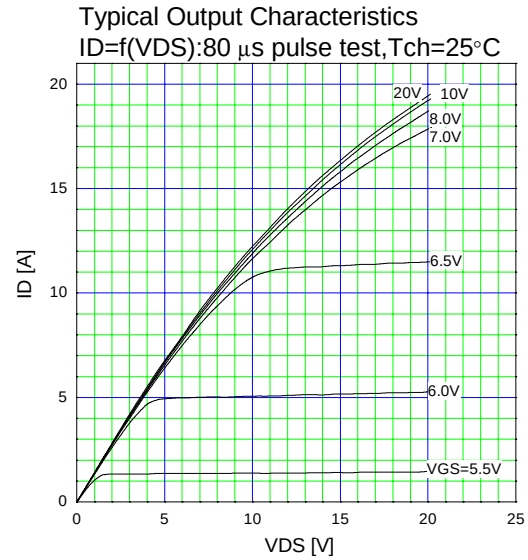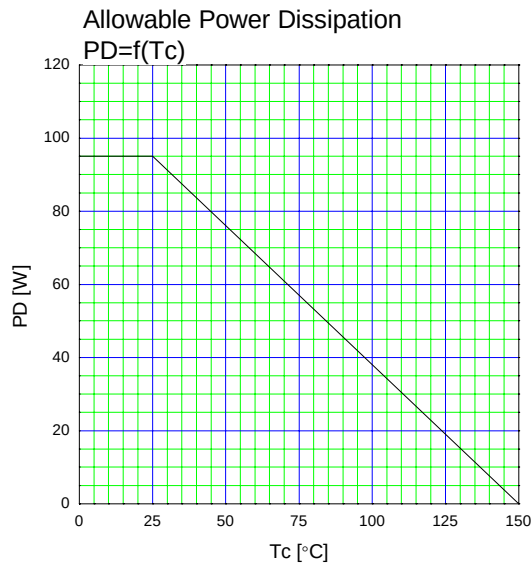

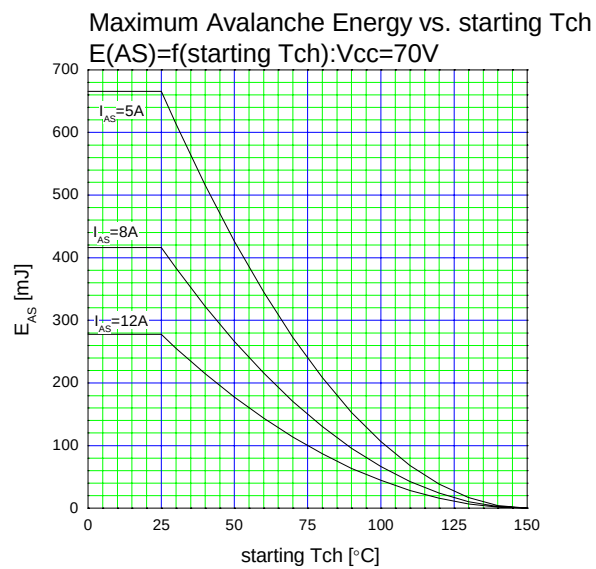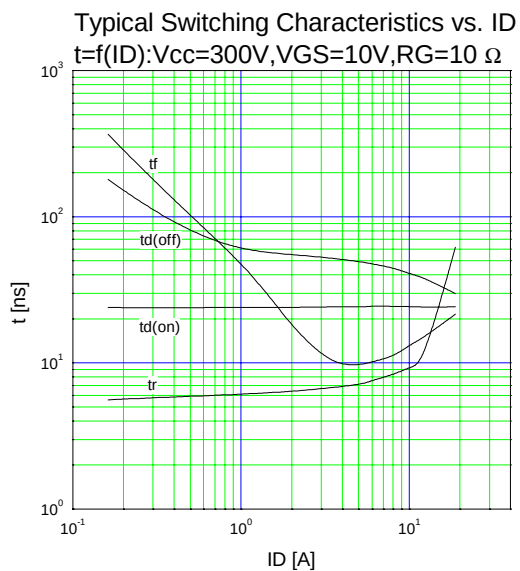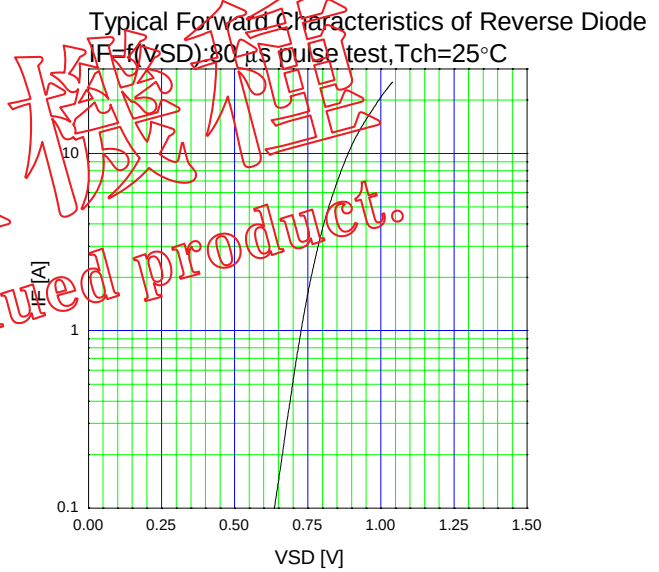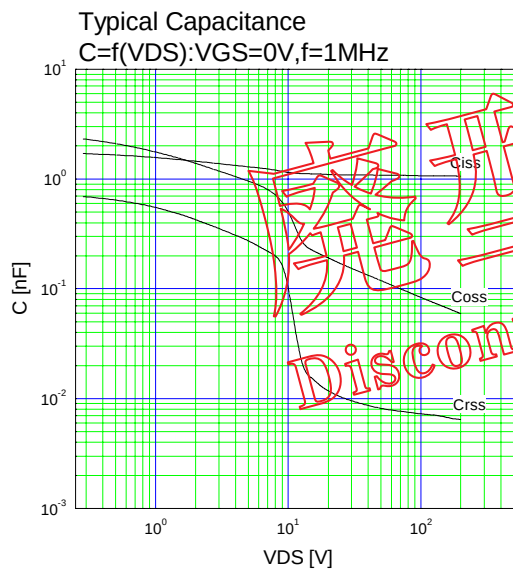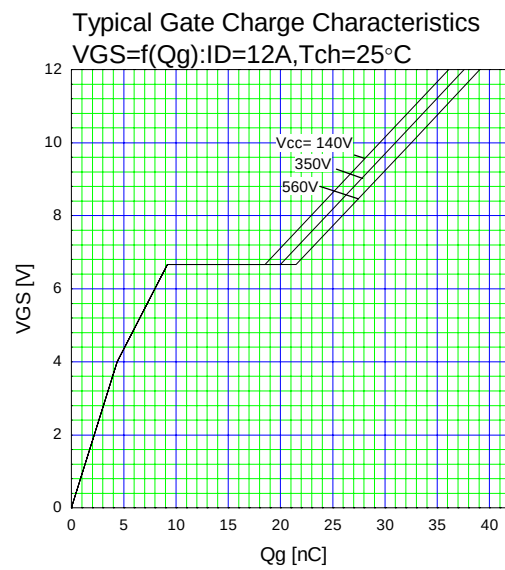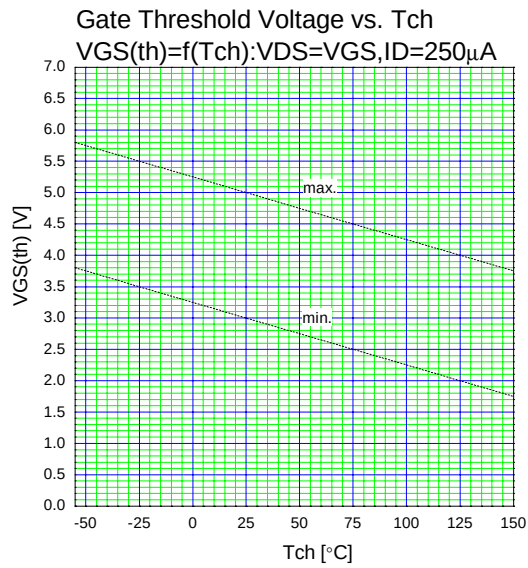

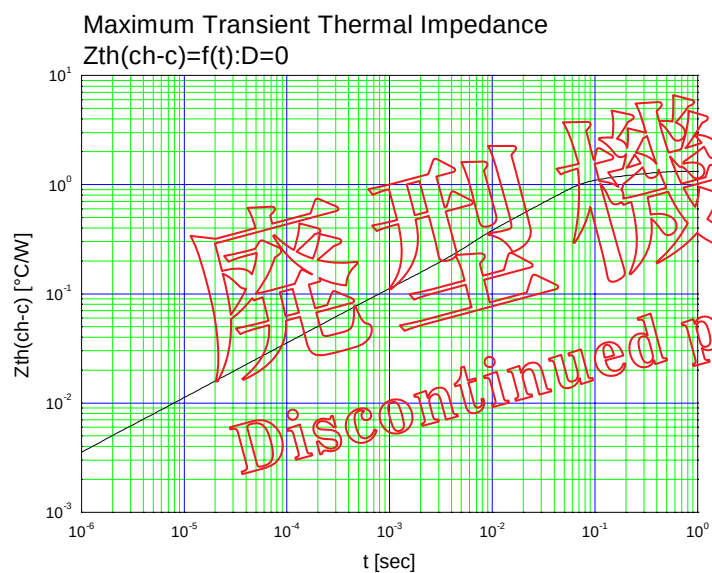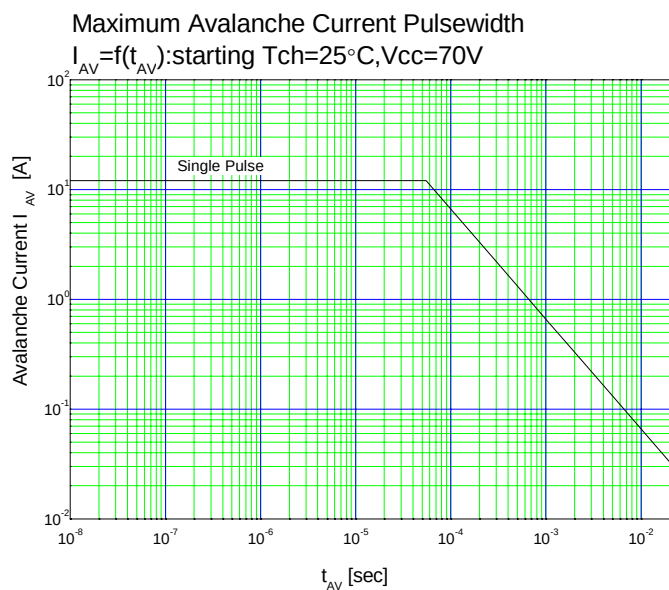

廢型機種
Discontinued product.