

PH868C15 (30A)

(150V / 30A)

[0401]

High Voltage Schottky barrier diode

Major characteristics

Characteristics	PH868C15	Units	Condition
V_{RRM}	150	V	
V_F	0.90	V	$T_c=25^{\circ}\text{C MAX.}$
I_o	30	A	

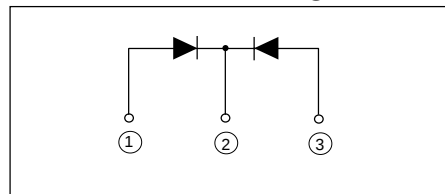
Features

- Low V_F
- High Voltage
- Center tap connection


Applications

- High frequency operation
- DC-DC converters
- AC adapter

Connection diagram



Outline drawings, mm

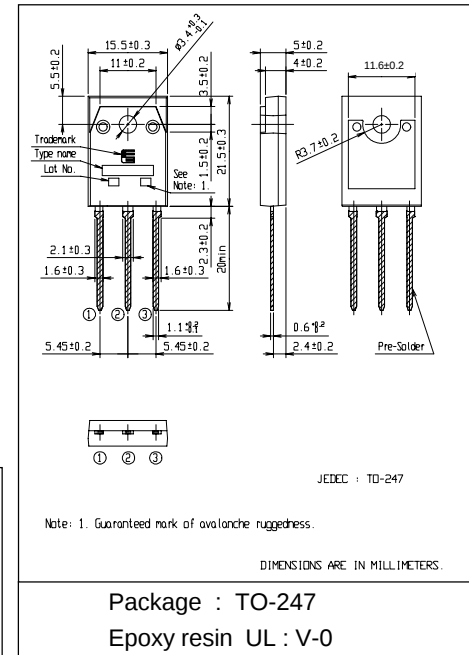

Maximum ratings and characteristics

- Absolute maximum ratings (at $T_c=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Conditions	Rating	Unit
Repetitive peak surge reverse voltage	V_{RSM}	$t_w=500\text{ns}$, duty=1/40	150	V
Repetitive peak reverse voltage	V_{RRM}		150	V
Average output current	I_o	Square wave, duty=1/2 $T_c=118^{\circ}\text{C}$	30 *	A
Non-repetitive surge current **	I_{FSM}	Sine wave 10ms 1shot	225	A
Operating junction temperature	T_j		+150	$^{\circ}\text{C}$
Storage temperature	T_{stg}		-40 to +150	$^{\circ}\text{C}$

* Out put current of center tap full wave connection







**Rating per element

- Electrical characteristics (at $T_c=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_F	$I_{FM}=15\text{A}$	0.90	V
Reverse current	I_R	$V_R=V_{RRM}$	200	μA
Thermal resistance	$R_{th(j-c)}$	Junction to case	1.2	$^{\circ}\text{C/W}$

- Mechanical characteristics


Mounting torque	Recommended torque	0.4 to 0.6	N·m
Approximate mass		4.9	g

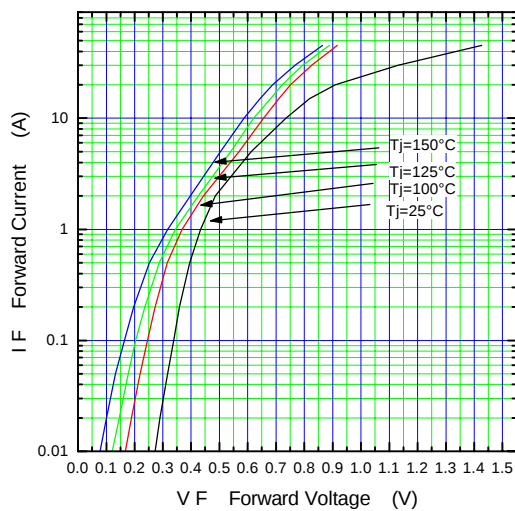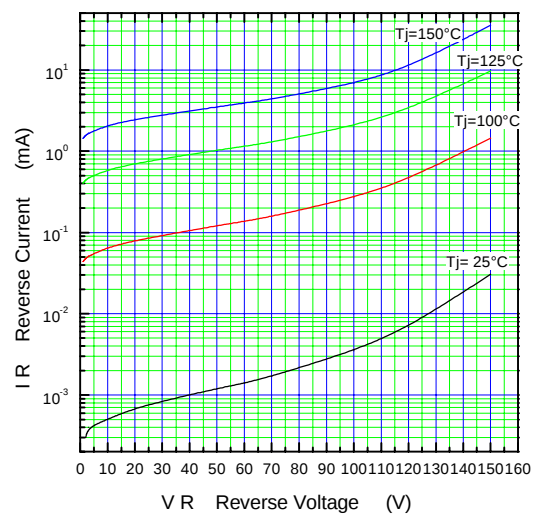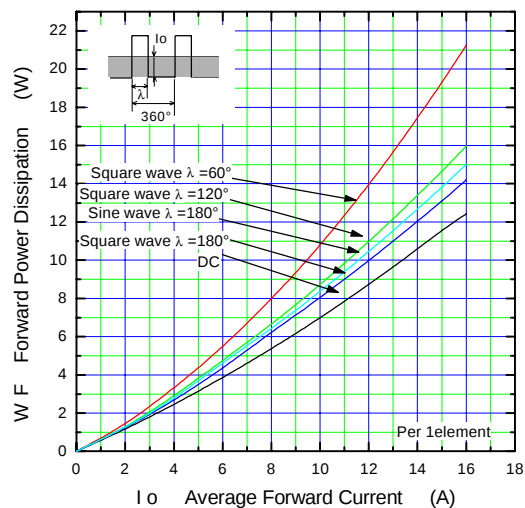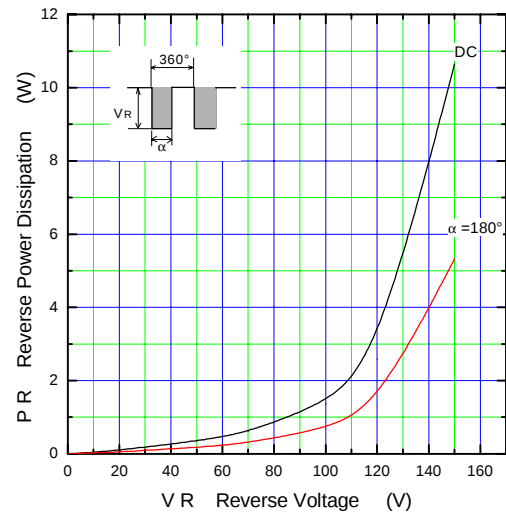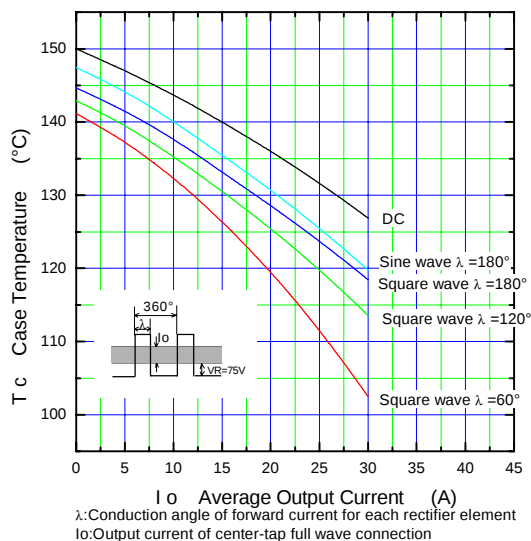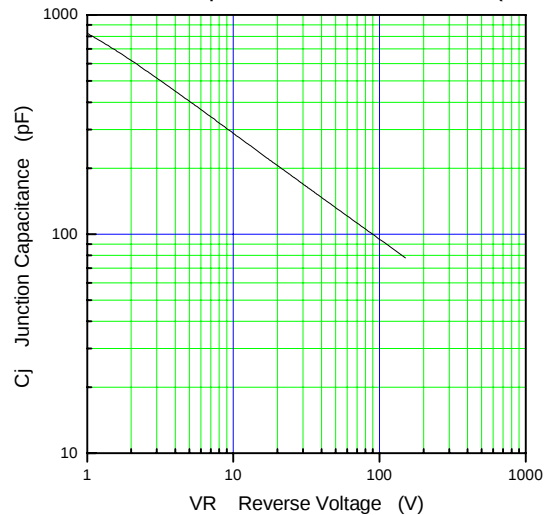■ Characteristics**Forward Characteristic (typ.)****Reverse Characteristic (typ.)****Forward Power Dissipation (max.)****Reverse Power Dissipation (max.)****Current Derating (I_o - T_c) (max.)****Junction Capacitance Characteristic (max.)**


(150V / 30A)

PH868C15 (30A)

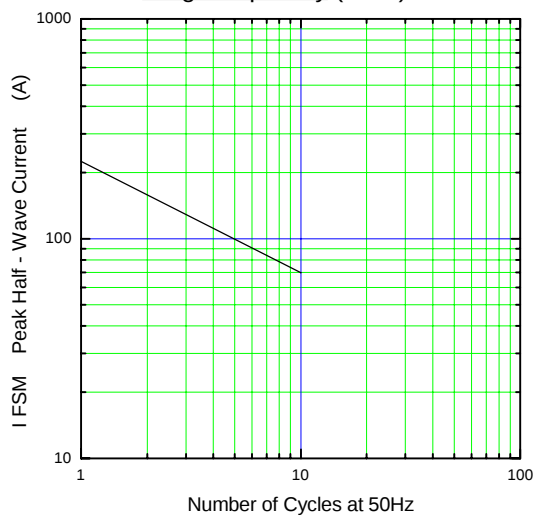Surge Capability (max.)



Surge Current Ratings (max.)

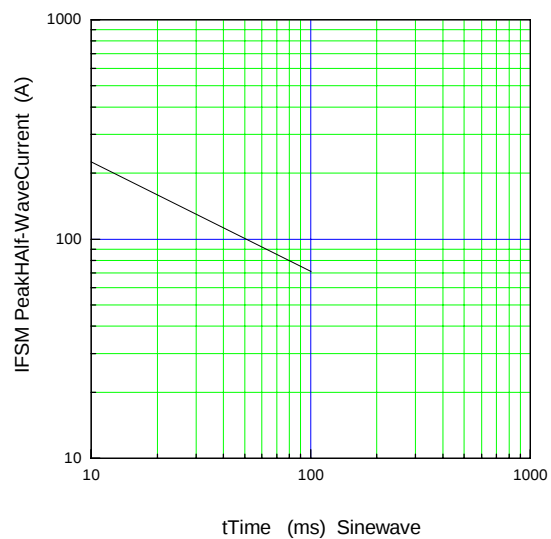

Transient Thermal Impedance (max.)

