

Low IR Schottky barrier diode


Features

- Low IR
- Low V_F
- Center tap connection


Applications

- High frequency operation
- DC-DC converters
- AC adapter

Outline drawings, mm

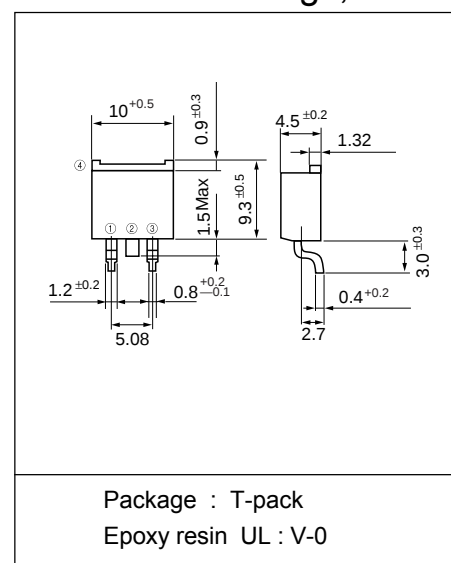

Connection diagram

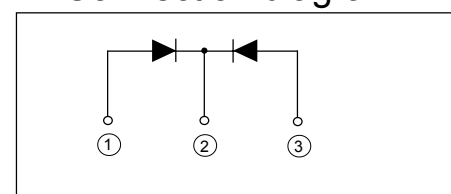

Maximum ratings and characteristics

Maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak surge reverse voltage	V_{RSM}	$t_w=500ns$, duty=1/40	100	V
Repetitive peak reverse voltage	V_{RRM}		100	V
Isolating voltage	Viso	Terminals-to-Case, AC. 1min.	1500	V
Average output current	I_o	Square wave, duty=1/2 $T_c=113^{\circ}C$	30 *	A
Non-repetitive surge current	I_{FSM}	Sine wave 10ms	160	A
non-repetitive reverse surge power dissipation	PRM	$t_w=10\mu s$, $T_j=25^{\circ}C$	750	W
Operating junction temperature	T_j		+150	$^{\circ}C$
Storage temperature	T_{stg}		-40 to +150	$^{\circ}C$

* Out put current of center tap full wave connection

Electrical characteristics (at $T_a=25^{\circ}C$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage **	V_F	$I_F=15A$	0.86	V
Reverse current **	I_R	$V_R=100V$	200	μA
Thermal resistance	$R_{th(j-c)}$	Junction to case	1.25	$^{\circ}C/W$


**Rating per element

Mechanical characteristics


Mounting torque	Recommended torque	0.3 to 0.5	N·m
Approximate mass		2	g

Characteristics


Forward Characteristic (typ.)

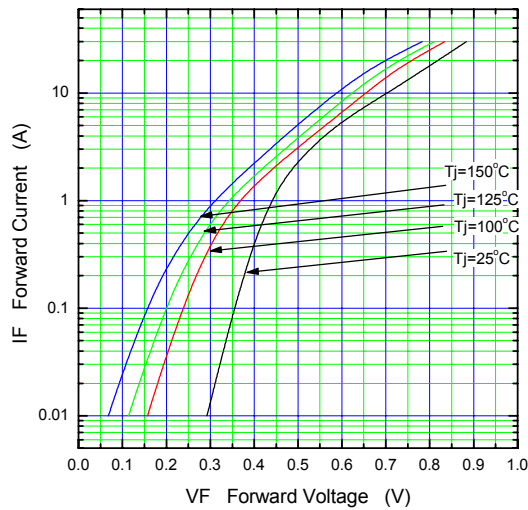



Reverse Characteristic (typ.)

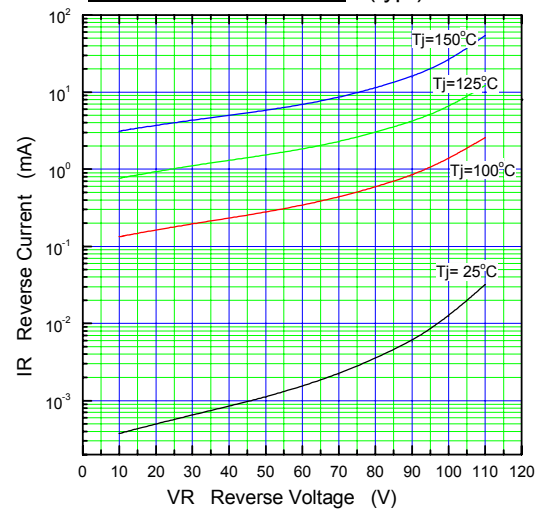


Forward Power Dissipation (max.)

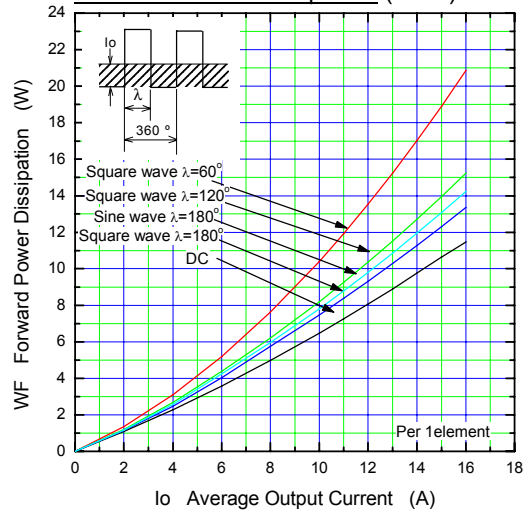

Reverse Power Dissipation (max.)

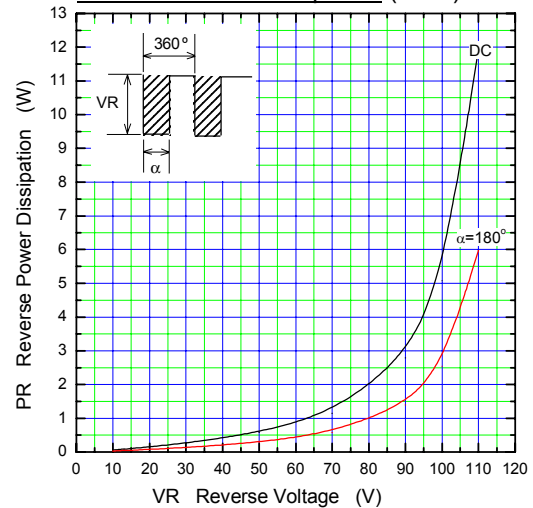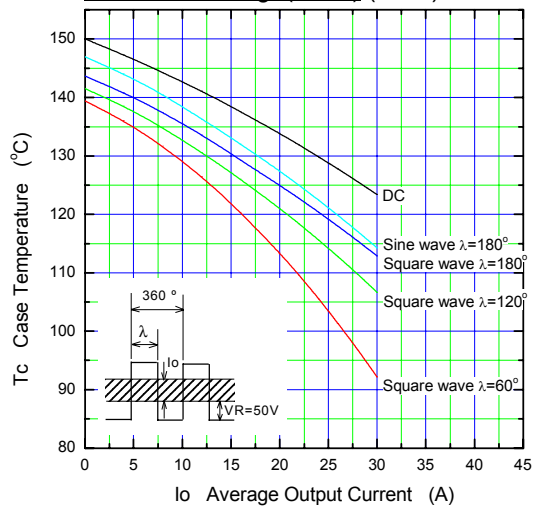Current Derating (I_o - T_c) (max.)

Junction Capacitance Characteristic (max.)

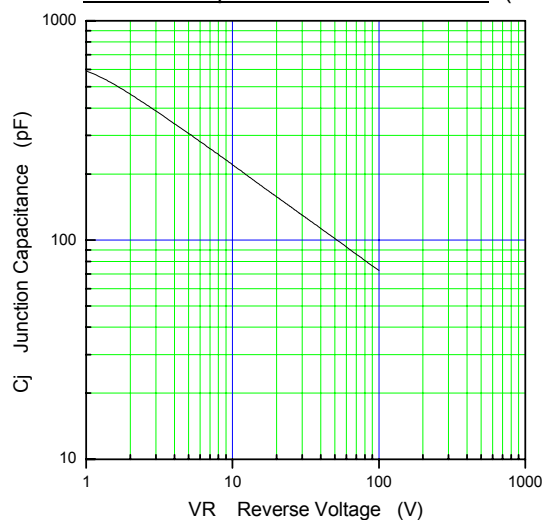

λ : Conduction angle of forward current for each rectifier element
 I_o : Output current of center-tap full wave connection

