
SEMiX® 13

Trench IGBT Modules

SEMiX 151GD126HDs


Target Data

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability



Typical Applications

- AC inverter drives
- UPS
- Electronic welding

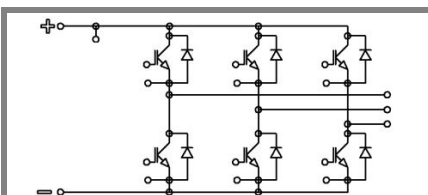
GD

Absolute Maximum Ratings		$T_{case} = 25^{\circ}C$, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT			
V_{CES}		1200	V
I_C	$T_c = 25 (80) ^{\circ}C$	150 (120)	A
I_{CRM}	$T_c = 25 (80) ^{\circ}C, t_p = 1 ms$	300 (240)	A
V_{GES}		± 20	V
$T_{vj} (T_{stg})$	$T_{OPERATION} \leq T_{stg}$	- 40 ... + 150 (125)	$^{\circ}C$
V_{isol}	AC, 1 min.	4000	V
Inverse diode			
I_F	$T_c = 25 (80) ^{\circ}C$	125 (85)	A
I_{FRM}	$T_c = 25 (80) ^{\circ}C, t_p = 1 ms$	310 (210)	A
I_{FSM}	$t_p = 10 ms; sin.; T_j = 25 ^{\circ}C$	700	A

Characteristics		$T_{case} = 25^{\circ}C$, unless otherwise specified			Units
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 4 mA$	5	5,8	6,5	V
I_{CES}	$V_{GE} = 0, V_{CE} = V_{CES}, T_j = 25 (125) ^{\circ}C$			0,3	mA
$V_{CE(TO)}$	$T_j = 25 (125) ^{\circ}C$		1 (0,9)	1,2 (1,1)	V
r_{CE}	$V_{GE} = 15 V, T_j = 25 (125) ^{\circ}C$		7 (11)	9,5 (13,5)	m Ω
$V_{CE(sat)}$	$I_C = 100 A, V_{GE} = 15 V, T_j = 25 (125) ^{\circ}C$, chip level		1,7 (2)	2,15 (2,45)	V
C_{ies}	under following conditions				nF
C_{oes}	$V_{GE} = 0, V_{CE} = 25 V, f = 1 MHz$				nF
C_{res}					nF
L_{CE}					nH
$R_{CC'+EE'}$	resistance, terminal-chip, $T_c = 25 (125) ^{\circ}C$		0,7 (1)		m Ω
$t_{d(on)}/t_r$	$V_{CC} = 600 V, I_C = 100 A$				ns
$t_{d(off)}/t_f$	$V_{GE} = \pm 15 V$				ns
$E_{on} (E_{off})$	$R_{Gon} = R_{Goff} = 6,8 \Omega, T_j = 125 ^{\circ}C$		9 (16)		mJ
Inverse diode					
$V_F = V_{EC}$	$I_F = 100 A; V_{GE} = 0 V; T_j = 25 (125) ^{\circ}C$, chip level		1,6 (1,6)	1,8 (1,8)	V
$V_{(TO)}$	$T_j = 25 (125) ^{\circ}C$		1 (0,8)	1,1 (0,9)	V
r_T	$T_j = 25 (125) ^{\circ}C$		6 (8)	7 (9)	m Ω
I_{RRM}	$I_F = 100 A; T_j = 25 (125) ^{\circ}C$				A
Q_{rr}	$di/dt = 4000 A/\mu s$				μC
E_{rr}	$V_{GE} = -15 V$				mJ
Thermal characteristics					
$R_{th(j-c)}$	per IGBT			0,21	K/W
$R_{th(j-c)D}$	per Inverse Diode			0,47	K/W
$R_{th(j-c)FD}$	per FWD				K/W
$R_{th(c-s)}$	per module		0,04		K/W
Temperature sensor					
R_{25}	$T_c = 25 ^{\circ}C$		5 \pm 5%		k Ω
$B_{25/85}$	$R_2 = R_1 \exp[B(1/T_2 - 1/T_1)] ; T[K]; B$		3420		K
Mechanical data					
M_s/M_t	to heatsink (M5) / for terminals (M6)	3/2,5		5 / 5	Nm
w			290		g

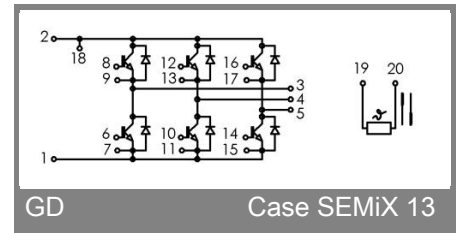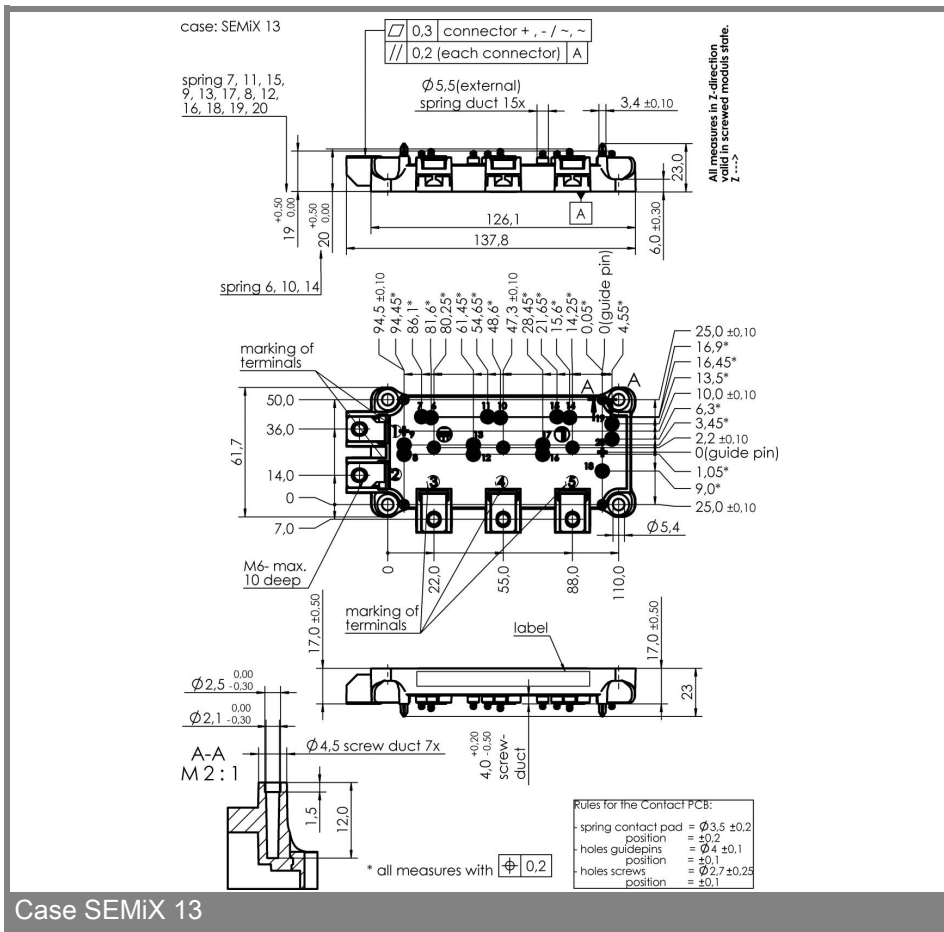

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.